

Table of Contents

		<u>Page</u>
1.1	Introduction	B1
1.2	Purpose and Objectives	B1
1.3	Headwaters of the Mojave River	B3
1.4	Review of Previous Studies	B5
1.5	Evaluation of Streamflow Data related to Cedar Springs Dam	B 2
1.6	Evaluation of Streamflow Data related to Mojave River Dam.....	B20
1.7	Conclusions	B28
1.8	References	B29

List of Tables

Table B1	Annual Measured Inflow above Cedar Springs Dam vs. Annual Flow at West Fork Mojave River near Hesperia.....	B15
Table B2	Summary of Mojave River Flows when Mean Daily Flow above Mojave River Dam exceeds 7,300 cfs	B21

List of Figures

Figure B1	Schematic Diagram of Surface Water Flow in the Mojave River Headwaters	B2
Figure B2	Key Technical Reports of Mojave River Hydrology and Upstream Dams	B6
Figure B3	Annual Measured Inflow above Cedar Springs Dam vs. Annual Flow at West Fork Mojave River near Hesperia (a) natural (pre-dam) conditions, WY 1960-61 to 1969-70 (b) post-dam conditions, WY 1971-72 to 1976-77 and WY 1995-96 to 2007-08, not including WY 2002-03 and WY 2004-05.	B13
Figure B4	Cumulative Annual Flows at Deep Creek near Hesperia vs. West Fork Mojave River near Hesperia (WY 1930-31 to WY 2009-10).....	B16
Figure B5	Comparison of Mean Daily Flow at Deep Creek near Hesperia and West Fork Mojave River near Hesperia for 43 Largest Storms on Record (WY 1930-31 to WY 2009-10)....	B18
Figure B6	Occurrences of Mean Daily Discharge exceeding 7,300 cfs (WY 1930-31 to WY 2009-10) West Fork Mojave River near Hesperia plus Deep Creek near Hesperia.....	B19
Figure B7	Summary of Mojave River Flows when Mean Daily Flow above Mojave River Dam exceeds 7,300 cfs	B23
Figure B8	Comparison of Maximum Mean Daily Flows above Mojave River Dam (above 7,300 cfs) and Associated Maximum Mean Daily Flow at Barstow (WY 1930-31 to WY 2009-10)	B24
Figure B9	Cumulative Mean Departure for San Bernardino Mountain Precipitation (WYs 1910-11 to 2007-08)	B25
Figure B10	Comparison of Maximum Mean Daily Flows above Mojave River Dam (above 7,300 cfs) and Associated Maximum Mean Daily Flow at Lower Narrows and Barstow – January and February, 1993	B27

1.1 Introduction



Streamflow losses from the Mojave River represent the primary source of groundwater recharge in the Mojave River Groundwater Basin. The Mojave River is fed primarily by storm runoff on the northern slopes of the San Bernardino Mountains. In the summer of 1971, the construction of two dams in the headwaters of the Mojave River was completed. Cedar Springs Dam was constructed in the upper portion of the West Fork of the Mojave River (West Fork) by the Department of Water Resources (DWR) and formed Silverwood Lake, a key storage reservoir and regulating facility for the State Water Project (SWP) (Figure B1).

At approximately the same time, the U.S. Army Corp of Engineers (USACE) completed construction of the Mojave River Dam at the confluence of West Fork and Deep Creek, approximately 5 miles downstream of Cedar Springs Dam at a location known locally as The Forks (for this reason, the Mojave River Dam has also been referred to previously by others as Forks Dam). The primary purpose of the Mojave River Dam was to provide flood protection to the cities of Victorville and Barstow, approximately 19,000 acres of agricultural land, and important highways and railroads located along the banks of the Mojave River (USACE, 1981). While it is widely accepted that the natural flow regime was altered at both dam sites, questions remain as to the potential impact of the dams on downstream Mojave River flows and groundwater recharge despite efforts by investigators to resolve this issue.

1.2 Purpose and Objectives

Numerous technical studies have been conducted over the past several decades characterizing the hydrology of the Mojave River and the evolution of surface water-groundwater interactions along its 100-mile course across the Mojave River Basin. While pertinent hydrologic information and insights into the factors that affect downstream flows have been presented in several studies, the strength of conclusions on the downstream impact of the dams have varied depending on the method of analysis and period of hydrologic record evaluated. A literature review reveals that the magnitude and duration of flows in the downstream portions of the basin are controlled by several inter-related natural and anthropogenic factors. The degree by which each factor has influenced downstream flows and groundwater recharge has been difficult to quantify, especially considering that data are limited to a handful of wet periods that have produced significant stormflows. Additionally, varying perceptions of the function, design characteristics, and operational history of the upstream dams has historically been a source of confusion. Finally, given that many of the key studies on this issue were conducted more than 30 years ago (i.e., only a few years after the completion of the dams), this study presented an opportunity to use a more current hydrologic dataset to substantiate previous findings.

The primary objectives of this evaluation are described below.

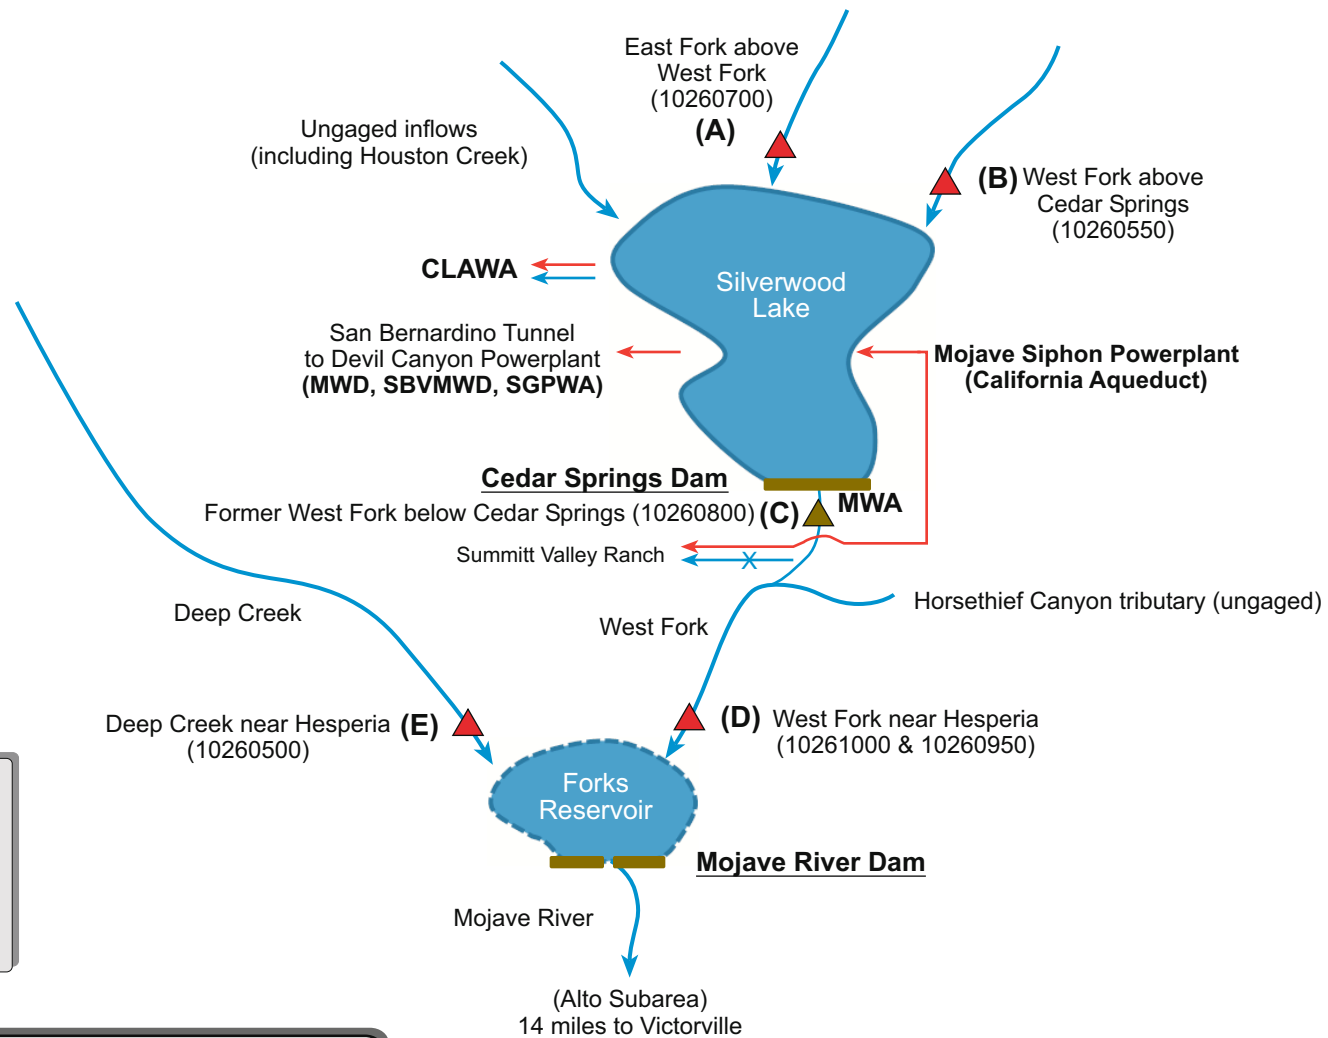

LEGEND

- ← State Water Project Flow Direction
- ← Natural Flow Direction
- MWA - Mojave Water Agency
- MWD - Metropolitan Water District
- CLAWA - Crestline Lake Arrowhead Water Agency
- SBVMWD - San Bernadino Valley Municipal Water Agency
- SGPWA - San Gorgonio Pass Water Agency

February 2013

TODD ENGINEERS
Alameda, California

Figure B1
Schematic Diagram of
Surface Water Flow
in the Mojave River
Headwaters

1. Describe the history of surface water flow conditions in the Mojave River headwaters both prior to and following the construction of the Cedar Springs Dam and Mojave River Dam
2. Document the data, methods of analysis, and key findings from previous studies that directly or indirectly address the potential impact of the dams on downstream flows and groundwater recharge, and
3. Present updated conclusions on the downstream impact of the dams incorporating previous studies with additional evaluation of streamflow data collected through the 2009-10 water year.

1.3 Headwaters of the Mojave River

In order to evaluate the potential impact of the Cedar Springs Dam and Mojave River Dam on downstream flows and groundwater recharge, it is essential to understand the surface water flow regime of the Mojave River headwaters. **Figure B1** shows a schematic diagram of the headwaters region. Depicted on the figure are the locations of the major natural tributary drainages in relation to the two dams and historical stream gaging stations. The hydrologic relationship between key features and the relevant design characteristics of the two dams and associated reservoirs are described below. Complete design specifications for the Mojave River Dam and Cedar Springs Dam are presented in USACE (1966) and DWR (1974), respectively.

As shown in the lower portion of **Figure B1**, the Mojave River is formed by two smaller streams, West Fork and Deep Creek. These streams converge above the Mojave River Dam at The Forks, located approximately 14 miles south (upstream) of the City of Victorville. The elevation of the stream channel at the Mojave River Dam site is 2,972 feet msl. The Mojave River Dam is an earthfill structure with a height of 200 feet and crest length of 2,200 feet. The dam outlet works is ungated (USACE, 1966). The dam was designed to provide a sufficient reservoir capacity to reduce the reservoir design (standard project) flood from a peak inflow of 94,000 cubic feet per second (cfs) to a peak outflow of 23,500 cfs and pass the spill-way design (maximum probable) flood with a peak inflow of 186,000 cfs and a peak outflow of 131,300 cfs. When the inflow above the dam is less than 7,300 cfs, water flows through the outlet works effectively unimpeded. For periods when inflows above the dam exceed 7,300 cfs, flow through the outlet works is weir-controlled (i.e., a portion of the inflow is detained above the Mojave River Dam creating a temporary reservoir (Forks Reservoir) that attenuates peak downstream flows. The net capacity of the Forks Reservoir at the spillway crest is 78,700 AF, taking into consideration 11,000 AF for accumulated sediment. The reservoir is designed to empty within 2.33 and 3.33 days following the standard project flood and maximum probable flood, respectively (USACE, 1970).

Since 1930, the USGS has monitored flows above the Mojave River Dam at two locations: West Fork near Hesperia (USGS Station No. 10261000/10260950, labeled "D" on **Figure B1**) and Deep Creek near Hesperia (USGS Station No. 10260500; labeled "E" on **Figure B1**). The sum of the flows for these two

gaging stations effectively represents the total inflow above the Mojave River Dam. Since 1930, flows from Deep Creek and West Fork have respectively contributed 67 and 33 percent to the total flows above the Mojave River Dam.

Flows in Deep Creek are not regulated by any flow control structures; conversely, a portion of the natural flows in the West Fork of the Mojave River have been altered by the construction of Cedar Springs Dam and by historical diversions. Cedar Springs Dam is a zoned-earth and rock-filled structure with a height of 213 feet and a crest length of 2,250 feet. The dam outlet works include valves that are used to control the releases of imported SWP water and natural runoff from Silverwood Lake. The construction of Cedar Springs Dam formed Silverwood Lake, a 995-acre recreational lake that represents the highest reservoir in the SWP at 3,350 feet msl.

The conveyance of SWP-designated water into and out of Silverwood Lake area is depicted by the red colored arrows on **Figure B1**. SWP water that flows down the California Aqueduct is discharged and stored in Silverwood Lake through the Mojave Siphon Powerplant. State Water Contractors that accept SWP water deliveries from Silverwood Lake include the following:

- Mojave Water Agency (MWA)
- Crestline-Lake Arrowhead Water Agency (CLAWA)
- Metropolitan Water District (MWD)
- San Bernardino Valley Municipal Water District (SBVMWD)
- San Geronio Pass Water Agency (SGPWA)

Depending on the request, SWP water from Silverwood Lake is either pumped through the San Bernardino Tunnel to the Devil Canyon Powerplant and into the East Branch Extension (MWD, SBVMWD, and SGPWA), released through Cedar Springs Dam into the West Fork of the Mojave River (MWA), or pumped through a separate turnout and outlet works owned by CLAWA. As of 2011, MWA has accepted 107,000 AF of SWP deliveries from Silverwood Lake.

When the Department of Water Resources (DWR) constructed Cedar Springs Dam, it impounded a portion of the natural flows that would have otherwise flowed downstream in the West Fork of the Mojave River. To protect prior downstream surface water rights (including those appropriated by Summit Valley Ranch), DWR computes the amount of natural runoff that would have passed the dam site in the absence of Silverwood Lake and releases sufficient water to restore natural flows in the West Fork of the Mojave River. The method relies on the correlation of gaged inflows on two tributaries above Cedar Springs Dam: East Fork of West Fork (USGS Station No. 10260700; labeled “A” on **Figure B1**) and West Fork of the Mojave River above Cedar Springs Dam (USGS Station No. 10260550; labeled “B” on **Figure B1**) and gaged outflow at the dam site at West Fork of the Mojave River below Cedar Springs gage (USGS Station No. 10260800; labeled “C” on **Figure B1**) prior to the construction of the dam from WY 1960-61 through WY 1969-70. For higher flows, a change-in-storage method is used. In 1989, DWR

entered into an agreement with CLAWA to provide non-SWP water from Silverwood Lake to CLAWA through its separate turnout and outlet works to satisfy up to 1,302 AFY of prior surface water rights from Houston Creek, a tributary to Silverwood Lake. Additionally, a portion of the natural flows in West Fork below the Cedar Springs Dam site was utilized by Summit Valley Ranch (formerly Las Flores Ranch) prior to the dam's construction. The Summit Valley Ranch diversion structure was removed during the construction of the dam. Since then, DWR has satisfied the prior surface water right of Summit Valley Ranch by delivering SWP water directly from the Mojave Siphon Powerplant through a 3,290-foot pipeline to the ranch. The pipeline has a flow capacity of 23 cfs, similar to the original ranch diversion structure. Prior to the construction of the dam, the estimated average annual water diversion by Summit Valley Ranch was estimated at 1,622 AFY (Bookman-Edmonston Engineering, Inc., 1978).

DWR is obligated to release natural runoff entering Silverwood Lake to the West Fork of the Mojave River within a 48-hour period and typically does so within 24 hours in order to maintain a normal operating water level range to support SWP operations (MWA, 2011). Downstream releases into West Fork are typically made from the Mojave Siphon via an outlet on the Summit Valley Ranch diversion structure. SWP water from the siphon is released at the same time an equal amount of natural inflow to the reservoir is booked over to the SWP account. Downstream releases between 23 and 5,000 cfs are usually released through the outlet works. Flows above 5,000 cfs either are temporarily stored in the reservoir for later release within the 48-hour period or discharged over the spillway (DWR, 1974).



As shown on **Figure B1**, releases from Silverwood Lake combine with ungaged flows from other contributing watershed areas of West Fork through Horsethief Canyon above the West Fork gage near Hesperia. Minor streamflow losses occur in the reach between Cedar Springs Dam and the West Fork gage near Hesperia. Notwithstanding these losses, a comparison between the releases from Silverwood Lake to flows at the West Fork gage near Hesperia from 1975 to 2008 indicates that releases from Silverwood Lake contribute 70 percent of the total flow in West Fork near Hesperia, while the remaining 30 percent is derived from natural runoff from Horsethief Canyon (MWA, 2011). Due to its location, the influence of anthropogenic activities in the West Fork watershed, including the operation of Silverwood Lake, diversion practices related to Summit Valley Ranch, and other land use changes, are captured in the streamflow records for the West Fork gage near Hesperia.

1.4 Review of Previous Studies

For this evaluation, technical reports prepared by the Department of Water Resources (DWR), U.S. Geological Survey (USGS), and private consultants over the past 50 years, as well as various memoranda and presentations prepared to support implementation of the Mojave Basin Area Judgment were reviewed. A timeline of key publications related to Mojave River flows and the potential downstream impacts of the Cedar Springs Dam and Mojave River Dam, including dam and reservoir design manuals, technical investigations, and position papers is presented in **Figure B2**.

Year

1960

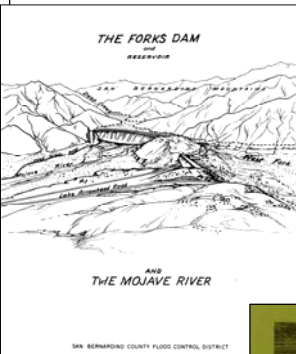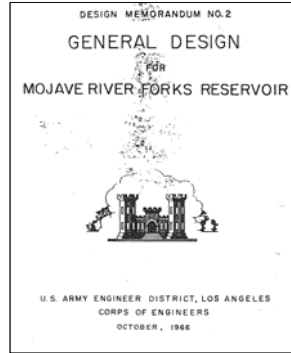

1965

DWR, 1964, Determination of Underflow at the Cedar Springs Damsite, July.

USACE, 1966, Design Memorandum No. 2, General Design for Mojave River Forks Reservoir, October.

SBC Flood Control District, 1968, The Mojave River and the Forks Dam, May.

USGS, Hardt, 1969, Mojave River Basin Ground-Water Recharge-Floods of January and February 1969, Open-File Report.

1970

USACE, 1970, Information Pamphlet on Mojave River Forks Reservoir, June.

Cedar Springs Dam and Mojave River Dam completed - Summer 1971

USGS, Hardt, 1971, Hydrologic Analysis of Mojave River Basin, CA, Using Electric Analog Model. Open-File Report, August.

USGS, Durbin and Hardt, 1974, Hydrologic Analysis of the Mojave River, CA using a Mathematical Model, WRIR 17-74.

1975

Bookman Edmonston, 1978, Report on Analysis of Releases from Lake Silverwood in Satisfaction of Prior Downstream Rights, May 5.




1980

USGS, Buono and Lang, 1980, Aquifer Recharge from the 1969 and 1978 Floods in the Mojave River Basin, CA, WRIR 80-207.

USACE, 1981, Preliminary Study, Modifications to Mojave Dam, Mojave River, July.

MWA, 1983, Historic and Present Conditions, Helendale to Calico-Newberry Fault, December.

1985

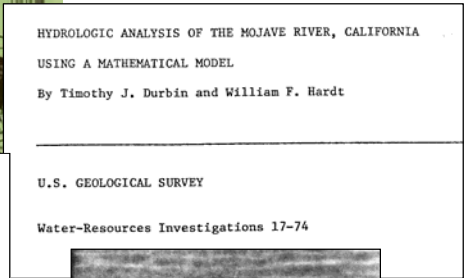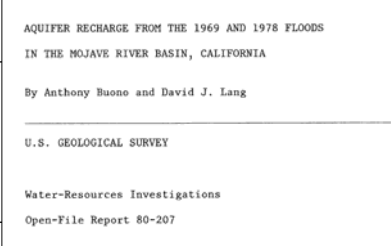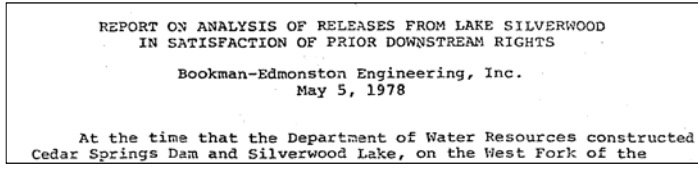

1990

Hanson, J.C., 1993, Analysis of the Flow of the Mojave River at Afton, CA, February. Prepared for MWA.

1995

USGS, Lines, 1996, Ground-Water and Surface-Water Relations along the Mojave River, Southern California, WRIR 95-4189.

2000




USGS, Stamos et al., 2001, Simulation of Groundwater-Flow in the Mojave River Basin, CA. WRIR 01-4002.

Wagner, 2003, Memorandum re: Baja Subarea - Question 4 from Court's Intended Ruling, Jan-29, 2003. March 12, 2003.

2005

Wagner, 2008, Presentation on Water Supply and Water Use Issues Affecting the Baja Subarea and the Proposed Free Production Allowance for Water Year 2008-09, Watermaster Adhoc Committee Meeting, March 10.

2010

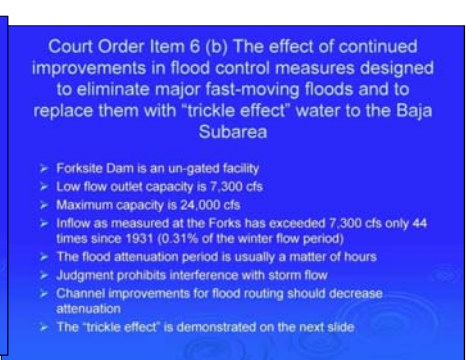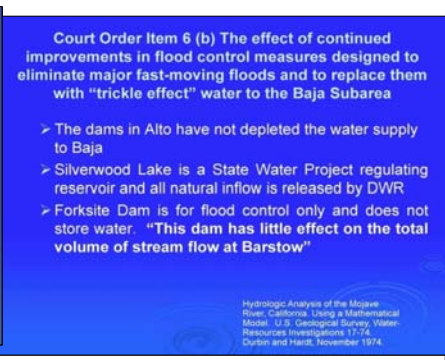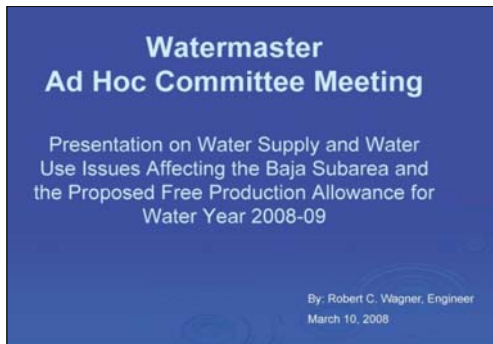

February 2013
TODD ENGINEERS
Alameda, California

Figure B2
Key Technical Reports
of Mojave River
Hydrology and
Upstream Dams

Of the previous studies related to flows in the Mojave River, only one study (Bookman-Edmonston Engineering, Inc., 1978) quantifies the potential downstream impacts from Cedar Springs Dam, and only one other study (Durbin and Hardt, 1974) quantifies the potential downstream impacts from the Mojave River Dam. Several other studies (Hardt, 1969; Hardt, 1971; Buono and Lang, 1980; Lines, 1996; Stamos, et al., 2001) provide valuable information and insights that have advanced the understanding of the factors that have influenced the frequency and magnitude of downstream flows in the Mojave River and groundwater recharge along its 100-mile course across the Mojave River Basin. A summary of the key reports, including description of the data, methods of analysis, and principal findings, is presented below in chronological order.

Hardt (1969) estimated the amount of groundwater recharge in the Mojave River Basin during the 1969 winter floods. Two methods were used to estimate groundwater recharge: 1) a surface water loss method based on changes in surface water flows between the six USGS stream gaging stations located between the headwaters of the Mojave River and Afton, and 2) groundwater level change method based on water level changes in selected wells along the Mojave River and estimates of specific yield. Evaluation of stormflows for individual flood events in January and February 1969 indicate that the antecedent moisture content of the river-channel sediments played a key role in the volume of stormflows reaching the downstream portions of the basin and exiting Afton Canyon. Data and analyses from this study are later incorporated in the study by Buono and Lang (1980) which compared streamflows during the winter floods of 1969 and 1978.

Hardt (1971) developed the first groundwater flow model in the Mojave River Basin using an electric analog model. As part of his study, Hardt used the USGS streamflow records to develop double-mass curve diagrams to depict and identify changes in streamflow characteristics between the headwaters and Barstow. The diagrams illustrated that stormflows reaching Lower Narrows and Barstow began to decrease beginning as early as 1946 through 1968 (the end of the dataset). Such decreases are correlated to dry conditions in the headwaters from 1945 to 1965. No explanation is provided as to whether such decreases in downstream flows are indicative of any factor other than lower storm runoff volumes generated in the headwaters during the drought period.

Durbin and Hardt (1974) developed a mathematical model for the primary objective of evaluating the ability of the Mojave River channel to convey water downstream from Silverwood Lake. A secondary objective of the study was to evaluate and estimate the effects of the Mojave River Dam on the natural streamflow of the Mojave River.

The development of the mathematical model was based in part on the evaluation of streamflow depletion between USGS stream gaging stations during 18 floods that produced flow at Barstow from 1930 to 1972. Results of the evaluation indicate that the infiltration rate for two reaches (The Forks to Lower Narrows and Lower Narrows to Barstow) varies widely for similar inflow rates at the upstream

gage of the respective reach. However, infiltration rates in both reaches increased after 1958 and are correlated to 1) the extended drought period that began in 1947 and 2) lower water levels (and increased available storage beneath the river channel) due to increased production in the basin.

The model was also based in part on findings from a controlled release from Silverwood Lake that was conducted by MWA in November 1972. Upon completion of the dam, MWA requested the release of the accumulated 3,100 AF at the maximum permissible rate to minimize flood damage. The release was performed during a time when the channel was dry which corresponds to maximum infiltration rates. The release was adjusted upward to a maximum of 1,950 cfs and was maintained at this rate for 18.5 hours. The discharge was measured at various locations resulting in approximately 13 percent of the water infiltrating along the reach between Cedar Springs Dam and the Mojave River Dam. The remaining 87 percent infiltrated into the alluvium below the Mojave River Dam with the majority infiltrating within 5 miles of the dam. The primary reasons given for the large river losses for the 5 miles reach below the Mojave River Dam are the high permeability of material in the river channel and a relatively low channel gradient at this location.

Simulation results related to imported water releases from Silverwood Lake indicate that the channel of the Mojave River can be used to efficiently convey water to the Barstow area only when the absorption capacity of the channel has been reduced by an antecedent flood. The volume of flow that can reach Barstow is dependent on the volume and duration of antecedent flooding, as well as the volume and rate at which water is released from Silverwood Lake. Without antecedent flooding, the absorption capacity of the channel is so great that only a small portion of water released from Silverwood Lake would reach the Barstow area. The absorption capacity of the channel is a function of the intrinsic characteristics of the unsaturated zone sediments (e.g., effective porosity and hydraulic conductivity) and at any given time the depth to the water table, local and regional hydraulic gradients in the shallow aquifer system, and any water held in the unsaturated zone (i.e., from antecedent floods).

Simulated release rates from Silverwood Lake were capped at 2,000 cfs in the study because higher release rates were considered to increase the likelihood of flood damages and because the mathematical model does not account for channel storage (the volume of water contained within the banks of the river channel during a flood). Channel storage represents the natural flood attenuation potential of the river channel and causes a reduction in peak discharge in the downstream direction independent of the depletion caused by infiltration. Its effect increases with increasing peak discharge and decreasing duration of flow. Although not directly evaluated in the study, the significance of channel storage on downstream flows is revealed in the tentative conclusion presented in the report that the volume of water that would reach Barstow, given a release rate from Silverwood Lake greater than 2,000 cfs, would not be much greater than the volume reaching Barstow at a release rate of 2,000 cfs. Even without the incorporation of channel storage, simulation results indicate that incremental

increases in the release rate from Silverwood Lake up to 2,000 cfs provide diminishing returns with respect to the increased volume of flow reaching Barstow.

To quantify the effects of the Mojave River Dam on the natural streamflow of the Mojave River, two historical floods were simulated using the model under two conditions: 1) without the dam and 2) with the dam. The first flood which occurred December 3-12, 1966 and represents a relatively small flood with a total volume of 40,600 AF measured at the Mojave River Dam. The second flood occurred January 20-29, 1969 and represents a relatively large flood with a total volume of 101,000 AF measured at the Mojave River Dam. The results of the model simulations indicate that while the dam reduces the peak discharge and increases the total flood duration at Barstow on the order of less than one day, the dam has no effect on the total volume of streamflow at Barstow for both floods. Given that the primary limitation of the model acknowledged by the authors is that the effective area (or wetted perimeter) of the river channel is a fixed parameter in the model (i.e., independent of discharge rates in the channel), the conclusions on the effect of the Mojave River Dam presented in this report are in one respect conservative, given that the area through which infiltration occurs was probably larger than captured in the model for the unregulated stormflows in 1969 compared to the regulated stormflows in 1978. If the wetted perimeter was allowed to vary in the model, the simulated volume of downstream flows for the “without dam” scenario would probably be lower than reported and lower than the “with dam” scenario. A specific determination of the impacts of the Mojave River Dam on groundwater recharge was not included in the analysis.

Bookman-Edmonston Engineering, Inc. (1978) conducted an analysis on behalf of the MWA to evaluate releases made from Silverwood Lake to satisfy prior downstream water rights. The analysis included a detailed review of the hydrology of the Mojave River and of the procedure used by DWR to determine the amount of the releases to satisfy these rights. The principal focus of the analysis was to evaluate the DWR method of estimating natural inflow to the Silverwood Lake. The study also included a review of releases for the downstream water rights of Las Flores Ranch (now Summit Valley Ranch) compared to historical diversions as measured by DWR for a short period of record. The principal findings from the study are summarized below:

- The modified DWR correlation curve produces reasonable estimates of natural inflow at a 50 percent confidence level. However, it was recommended that a correlation curve developed by the report author be adopted that would result in estimates at a 95 percent confidence level.
- A change in storage method for estimating natural inflow was recommended for certain conditions. It was reported that DWR was in the process of developing such a procedure that would result in the correlation method being used for low flows and the change in storage method used for high flows.

- Additional investigation would be required to determine if net use by Las Flores Ranch has increased since the construction of Cedar Springs Dam.
- Other questions were addressed resulting in the conclusion that apparent seepage into the San Bernardino Tunnel, underflow cut off at the dam site, and inaccuracies in upstream gaging stations would not result in any significant reduction in downstream flows.

Buono and Lang (1980) conducted an evaluation to assess and compare estimates of groundwater recharge resulting from the floods that occurred during the 1969 and 1978 water years. Included in the study was a comparison of the results of a previous study by Hardt (1969) that was limited to the flood of 1969. The same methods used by Hardt (1969) for determining aquifer recharge (surface water loss method and groundwater level change method) were applied. The results of the study show groundwater recharge in the uppermost reach between the Forks and Lower Narrows was approximately three times greater in 1978 (139,330 AF) compared to 1969 (45,411 AF) even though flows measured at the Forks were similar. Thus, while the total volume of groundwater recharge for the entire 100-mile reach between The Forks and Afton was larger in 1978, groundwater recharge in the lower two reaches from Lower Narrows to Barstow and from Barstow to Afton were smaller in volume in 1978 (despite being slightly higher in 1978 when calculated as a percentage of inflow to the respective upper stream gaging station). Flow conditions were attributed to 1) more evenly distributed precipitation in 1978 compared to 1969, 2) lower groundwater levels in 1978 providing more available storage for recharge, and 3) the attenuated flood peaks and longer flood durations in 1978 as a result of the slower release of water through the Cedar Springs and Mojave River dams. However, no evidence is provided that substantiates or quantifies the effect of either the Cedar Springs Dam or Mojave River Dam relative to other factors cited.

Lines (1996) conducted an evaluation of the flow characteristics in the Mojave River. As part of the study, the question of the potential impact of both the Cedar Springs and Mojave River dams on downstream flows was qualitatively considered by examining flow-duration curves for three Mojave River stream gaging stations (Lower Narrows, Barstow, and Afton) and separating mean daily flow records into pre-dam (1930 to 1971) and post-dam (1972 to 1994) periods. It is observed that the duration of the largest discharges (greater than 1,000 cfs) at each of the three stream gaging stations increased for the post-dam period dataset, suggesting that the dams have not decreased the frequency of large discharges from reaching downstream portions of the Mojave River, despite acknowledgement that both dams have attenuated flood peaks. Although the data certainly cannot be used to prove downstream impacts from the dams, because rainfall conditions during the pre-dam and post-dam periods were not incorporated in the analysis, conclusions that can be drawn from the flow-duration curves are limited in terms of proving that the dams have not impacted downstream flows.

Stamos, et al. (2001) used the Mojave River Basin groundwater model to simulate historical conditions to assess the influence of historical groundwater production in the upper portions of the basin on the frequency and magnitude of intermittent Mojave River flows and groundwater level declines in the Centro and Baja subareas. While no determination was made on the effect of the dams, this is the only study that quantifies the impact of pumping and the lowering of water levels along the river in the upper basin on downstream flows and recharge. As part of the evaluation, pumping in the upper region of the basin (Alto, Transition Zone, Este, and Oeste subareas) was turned off in the model for the base simulation period from 1931 to 1990. Simulation results show that groundwater recharge from the Mojave River increased on average 13,110 and 3,800 AFY for the Centro (not including Harper Lake) and Baja subareas, respectively. With respect to the Baja Subarea, 3,800 AFY represents approximately one-quarter of the 855,500 AF lost from storage during the simulation period from 1931 to 1990. Changes are attributable to simulated hydraulic heads in the Alto and Transition Zone subareas being near the altitude of the streambed throughout the upper region, which causes potential recharge from the Mojave River to be rejected in the upper region thereby allowing more streamflow to reach and recharge the lower region.

Wagner and Bonsignore (2003) summarizes in a MBA Watermaster-related memorandum the design characteristics and operational history of the Mojave River Dam and relevant stream gage data through 2002 and cites key findings from pertinent technical reports (all of which are included on **Figure B2**). This information is used to support his opinion that the Mojave River Dam “has not had a material effect on downstream water supply.” Additionally, the comparison of groundwater recharge downstream from Barstow in 1969 and 1978 *as a percentage of flow at Barstow* as reported in Buono and Lang (1980) is cited to suggest that the Mojave River Dam may have had a positive effect on downstream recharge. While the following revision would not change the conclusions made in the memorandum, it is important to recognize that this statement is misleading. It is more appropriate to compare for the two periods either 1) the volume of flow at Barstow as a percentage of flow measured at The Forks or 2) the volume of losses (groundwater recharge) between Barstow and Afton. In 1978, reported flows for the Barstow gage represented 29 percent of the flow measured at The Forks, while reported flows at Barstow in 1969 were higher (46 percent of the flow measured at The Forks). Estimated losses between Barstow and Afton in 1969 (73,575 AF) were higher than in 1978 (53,387 AF). Thus a higher percentage of the flow at The Forks reached Barstow and a larger volume of groundwater recharge between Barstow and Afton was observed in 1969 prior to the construction of the Mojave River Dam. Based on these comparisons, it seems appropriate to state that while the 1969 and 1978 data reported by Buono and Lang cannot be used to conclusively implicate the Mojave River Dam as having a negative impact on Centro and Baja water supply, the data do not support the assertion that the Mojave River Dam may have had a positive impact on Centro and Baja water supply.

Wagner and Bonsignore (2010) reviewed streamflow data through 2009 and presents statistics regarding the dates and maximum mean daily flow of storm events for which the Mojave River Dam regulated flows. These data and review of design characteristics of the dam are used to support his earlier opinion that the dam has not had a significant impact of downstream water supply.

1.5 Evaluation of Streamflow Data related to Cedar Springs Dam



Although the conclusions drawn from previous studies provide a strong foundation of knowledge in regards to the potential downstream impacts of the dams, more recent streamflow data were evaluated using alternative methods of analysis in an effort to address (at least in part) remaining uncertainties. This section describes the evaluation of the effect of Cedar Springs Dam on downstream flows.

Based on the evaluation by Bookman-Edmonston Engineering, Inc. (1978) and given the operational guidelines for natural runoff releases through the dam, the Cedar Springs Dam site may have affected downstream flows in West Fork if 1) the DWR correlation procedure incorrectly estimates the volume of natural flow past the Cedar Springs Dam site or 2) the detainment of natural inflows into Silverwood Lake is not released in a manner that restores downstream flow rates. Previous investigators (Buono and Lang, 1980 and Lines, 1996) cite the flood attenuation effect of the collective dams, but no evidence is provided that substantiates the effect of Cedar Springs Dam or illustrates the degree of flood attenuation provided by Silverwood Lake. For these reasons, stream gage data collected through WY 2009-10 were analyzed using alternative methods to determine whether the volume or timing of releases from Silverwood Lake has adequately restored natural (pre-dam) flows below Cedar Springs Dam. Analyses are based on the premise that any significant downstream impacts from the construction and operation of Silverwood Lake would be manifested in flow records at the West Fork gage near Hesperia, the nearest downstream gage that has been in operation since 1930. Likewise, any significant changes in water diversions by the Summit Valley Ranch since the construction of Silverwood Lake are also addressed in this analysis. The evaluation reasonably assumes that land use in the contributing watershed areas above Horsethief Canyon and the Deep Creek gage near Hesperia have remained relatively unchanged over time.

With respect to volume, downstream impacts from Cedar Springs Dam would be manifested in changes to the following relationships from pre-dam to post-dam conditions:

1. The volume of flow at the West Fork gage near Hesperia compared to the volume of measured inflows above the Cedar Springs Dam site
2. The volume of flow at West Fork near Hesperia compared to the volume of flow at Deep Creek near Hesperia

Figure B3 shows the annual measured inflows above Cedar Springs Dam (represented by the sum of flows in East Fork of West Fork and West Fork above Cedar Springs) plotted against the annual flow at

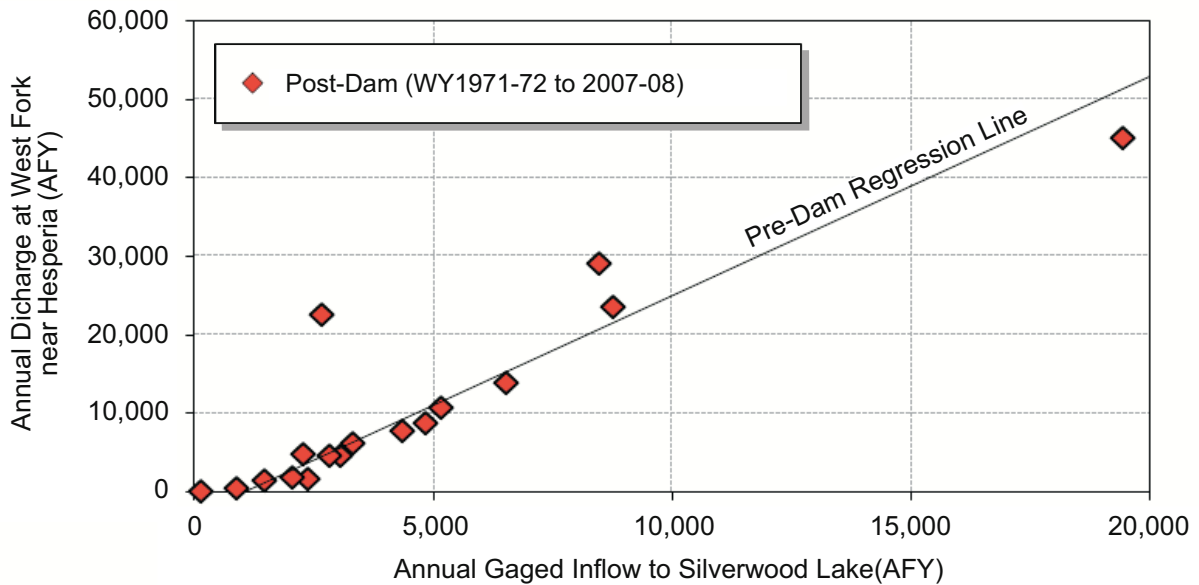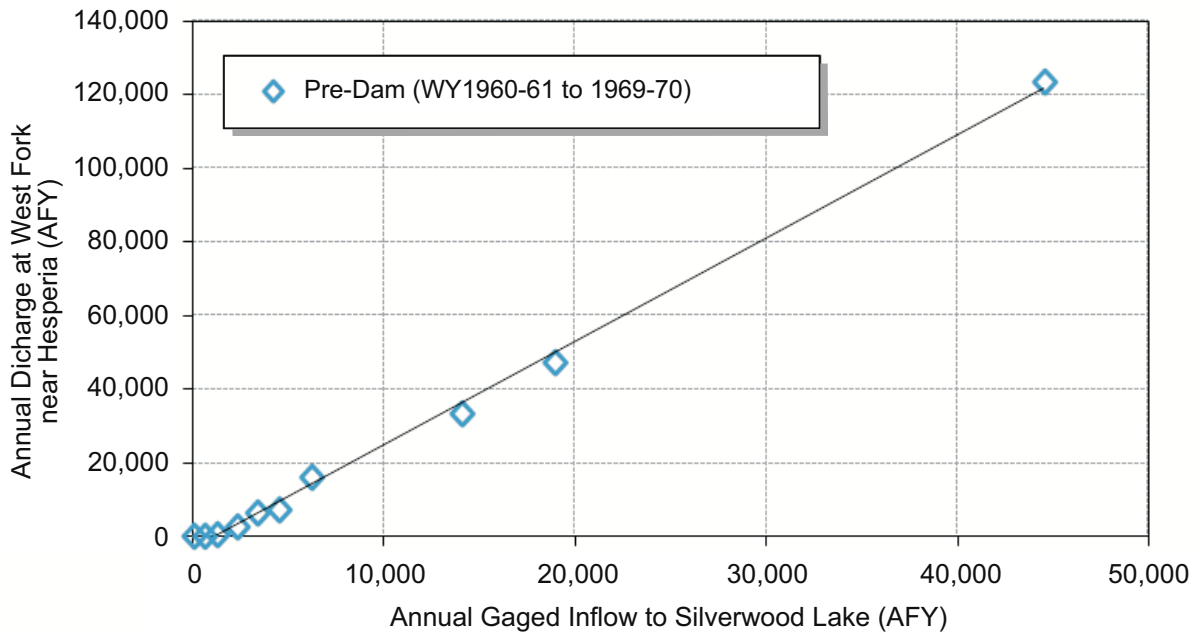

February 2013
 TODD ENGINEERS
 Alameda, California

Figure B3
Annual Measured Inflow
above Cedar Springs Dam vs.
Annual Flow at West Fork
Mojave River near Victorville

West Fork near Hesperia. Annual values are summarized in **Table B1**. The upper chart in **Figure B3** presents the data reported by Bookman-Edmonston, Engineering, Inc. (1978) for available pre-dam water years (WY) (WY 1960-61 to WY 1968-69). As illustrated by the tight clustering of data points around the best-fit linear regression line in the upper chart, there is a strong correlation between the volume of measured inflows above Cedar Springs Dam and the volume of flows below the West Fork gage near Hesperia under natural (pre-dam) conditions. The lower chart shows the data points for the post-dam period (WY 1971-72 to WY 2007-08) in relation to the pre-dam regression line. It is noted that there is a long gap in records in gaged inflows to Silverwood Lake from WY 1997-78 to WY 1994-95 and for one or both inflow gages in WY 2002-03 and WY 2004-05. The scale has been reduced in the lower chart to more clearly illustrate the relationship between the pre-dam and post-dam periods. As shown in the lower chart, the post-dam points also closely cluster around the pre-dam linear regression line, indicating that the volume of releases through Cedar Springs Dam is consistent with natural flows that would have flowed past the dam site if the dam were not constructed.

Flow volumes at West Fork near Hesperia were compared to flow volumes at the Deep Creek gage near Hesperia for pre-dam and post-dam periods. The data are listed below and depicted on **Figure B4**.

Period		Deep Creek		West Fork		Total
		AF	% of Total	AF	% of Total	AFY
Total	1930-31 to 2008-09	3,781,270	67.3%	1,837,028	32.7%	5,618,298
Pre-Dam	1930-31 to 1970-71	1,672,095	66.8%	831,449	33.2%	2,503,543
Post-Dam	1974-75 to 2008-09	2,028,442	67.6%	971,470	32.4%	2,999,913

The table above shows that for the total period of record, the contribution from Deep Creek and West Fork was 67.3 and 32.7 percent, respectively. Comparison of pre-dam and post-dam datasets shows that contributions from West Fork have decreased marginally (by 0.8 percent) following construction of the dam. Given that the error for estimated mean daily discharges for the Deep Creek and West Fork gages average about 20 and 15 percent, respectively, (as reported in 1996 by Lines based on communication with the USGS) calculated differences are clearly within the margin of error of the gages and may not be significant.

Figure B4 compares the annual volume of flows at Deep creek versus West Fork pre-dam (1930-31 to 1970-71) and post-dam (1974-75 to 2008-2009) periods (the West Fork gage was inactive from 1971-72 to 1973-74). As shown in the figure, the slopes of the best-fit linear regression lines for the pre-dam dataset and post-dam dataset are virtually identical within the range of flow volumes observed in both periods. Given the relatively large scatter of data points both above and below the best-fit regression

Table B1. Annual Measured Inflow above Cedar Springs Dam vs. Annual Flow at West Fork Mojave River near Hesperia

Pre-Dam Period

Water Year			Annual Gaged Inflow to Silverwood Lake	Annual Discharge at West Fork near Hesperia
			AFY	AFY
1960	-	1961	73	60
1961	-	1962	6,174	16,302
1962	-	1963	609	85
1963	-	1964	1,289	732
1964	-	1965	3,355	6,329
1965	-	1966	14,069	33,672
1966	-	1967	18,944	47,166
1967	-	1968	4,462	7,548
1968	-	1969	44,495	123,730
1969	-	1970	2,273	2,895

West Fork gage total for WY 1960-61 is from Apr. through Sep 1961

West Fork gage total for WY 1969-70 is from Oct. 1969 through Mar. 1970


Post-Dam Period

Water Year			Annual Gaged Inflow to Silverwood Lake	Annual Discharge at West Fork near Hesperia ^a
			AFY	AFY
1971	-	1972	2,384	1,602
1972	-	1973	8,767	23,668
1973	-	1974	4,852	8,839
1974	-	1975	3,058	4,683
1975	-	1976	3,307	6,204
1976	-	1977	2,067	1,850
1995	-	1996	4,355	7,840
1996	-	1997	5,158	10,660
1997	-	1998	19,421	45,260
1998	-	1999	1,479	1,472
1999	-	2000	2,286	4,843
2000	-	2001	2,830	4,660
2001	-	2002	155	0
2003	-	2004	2,682	22,585
2005	-	2006	8,484	29,061
2006	-	2007	901	442
2007	-	2008	6,534	13,952

Flows from 1971-72 through 1973-74 estimated from West Fork below Mojave River Dam gage

Records for total gaged inflows to Silverwood Lake are incomplete for:
WY 1977-78 to 1994-95; 2002-03, 2004-05

Cumulative Annual Flows for Deep Creek Near Hesperia vs. West Fork near Hesperia (WY 1930-31 to WY 2008-09)

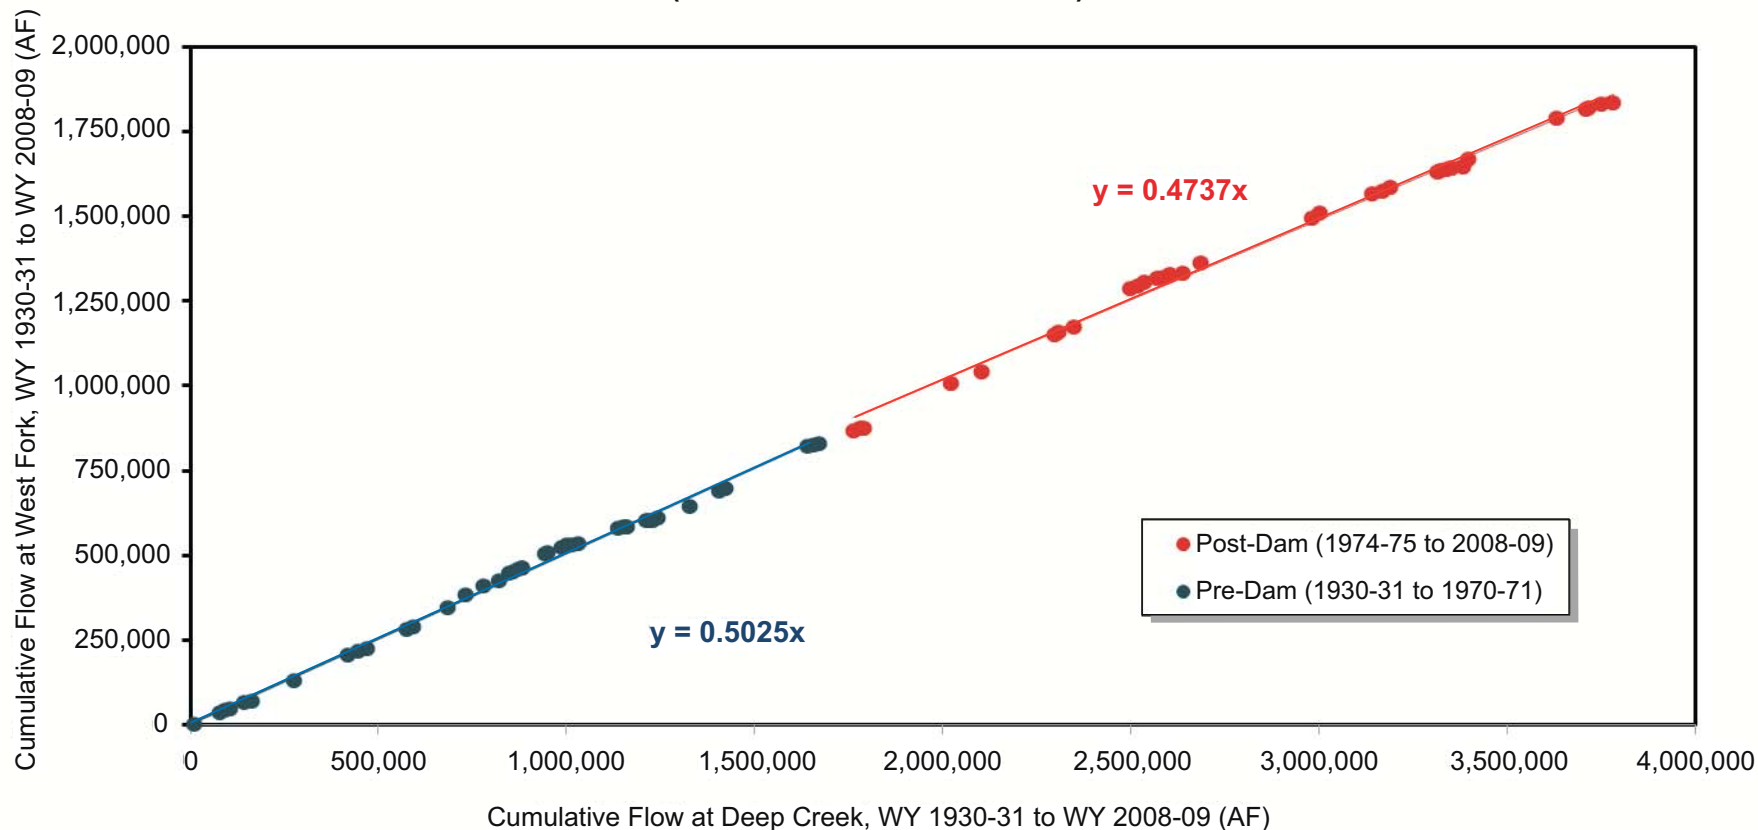


February 2013
TODD ENGINEERS
Alameda, California

Figure B4
Cumulative Annual Flows at
Deep Creek Near Hesperia vs.
West Fork Mojave River near
Hesperia

lines for both datasets, the volume of releases through Cedar Springs Dam appear to be consistent with natural flows that would have flowed past the dam site if the dam were not constructed.


On **Figure B5**, a double mass curve showing cumulative annual flows for Deep Creek versus West Fork for pre-dam (1930-31 to 1970-71) and post-dam (1974-75 to 2008-2009) periods was developed to examine the potential impact of Cedar Springs Dam on the volumes of downstream flows in West Fork. As shown in the figure, the slope of the best-fit linear regression line for the pre-dam dataset indicates that the annual volume of flow at the West Fork gage was historically 50.25 percent of the annual volume of flow at the Deep Creek gage prior to the construction of the dams. Whereas, since the construction of Cedar Springs Dam, the annual volume of flow at the West Fork gage has been 47.37 percent (2.88 percent less) than the annual volume of flow at the Deep Creek gage prior to the dam. While the calculated difference shown on the double mass curve may reflect negative impacts from Silverwood Lake or other anthropogenic activities on flows above the West Fork gage near Hesperia, the statistical significance of the calculated difference cannot be made from this chart. Notwithstanding this uncertainty, to provide some perspective, the 2.88 percent difference is equivalent to a potential loss of 27,800 AF (or 780 AFY on average) of West Fork flows over the 35-year post-dam period evaluated. While measurable, these volumes represent only 0.93 percent of the nearly 3,000,000 AF (85,200 AFY) of combined flows for the two gages and would not likely have any significant impact on Mojave River flows to the Centro and Baja subareas.

Although the operation of Silverwood Lake does not appear to have changed the natural volume of flows in West Fork, the flood attenuation effect of Silverwood Lake on flow rates in West Fork has not been verified in previous studies. To do so, selected mean daily flows for West Fork near Hesperia were compared to same-day mean daily flow rates at Deep Creek near Hesperia for pre-dam and post-dam periods. Since the attenuation effect of Silverwood Lake was most likely to have been greatest during large storm events, dates associated with the largest combined discharge from the two gages were selected for evaluation. **Figure B6** shows the comparison of mean daily flows for the West Fork and Deep Creek gages above the Mojave River Dam for the 43 largest discharges on record, which range from 7,370 to 24,400 cfs (data from storms producing combined discharge at The Forks above 7,300 cfs were also later used in the evaluation of the downstream effect of Mojave River Dam). Data points and the best-fit linear regression line in blue color represent pre-dam conditions, while data points and the best-fit linear regression line in green color represent post-dam conditions. While some data scatter around respective best-fit linear regression lines are evident in both datasets, the relative locations of the regression lines indicates that the operation of Silverwood Lake has decreased mean daily flows in the West Fork compared to natural (pre-dam) conditions during large storm events. The divergence of the regression lines in the direction of increasing flow rate for Deep Creek further indicates that the attenuation effect of Silverwood Lake increases with larger storm events.

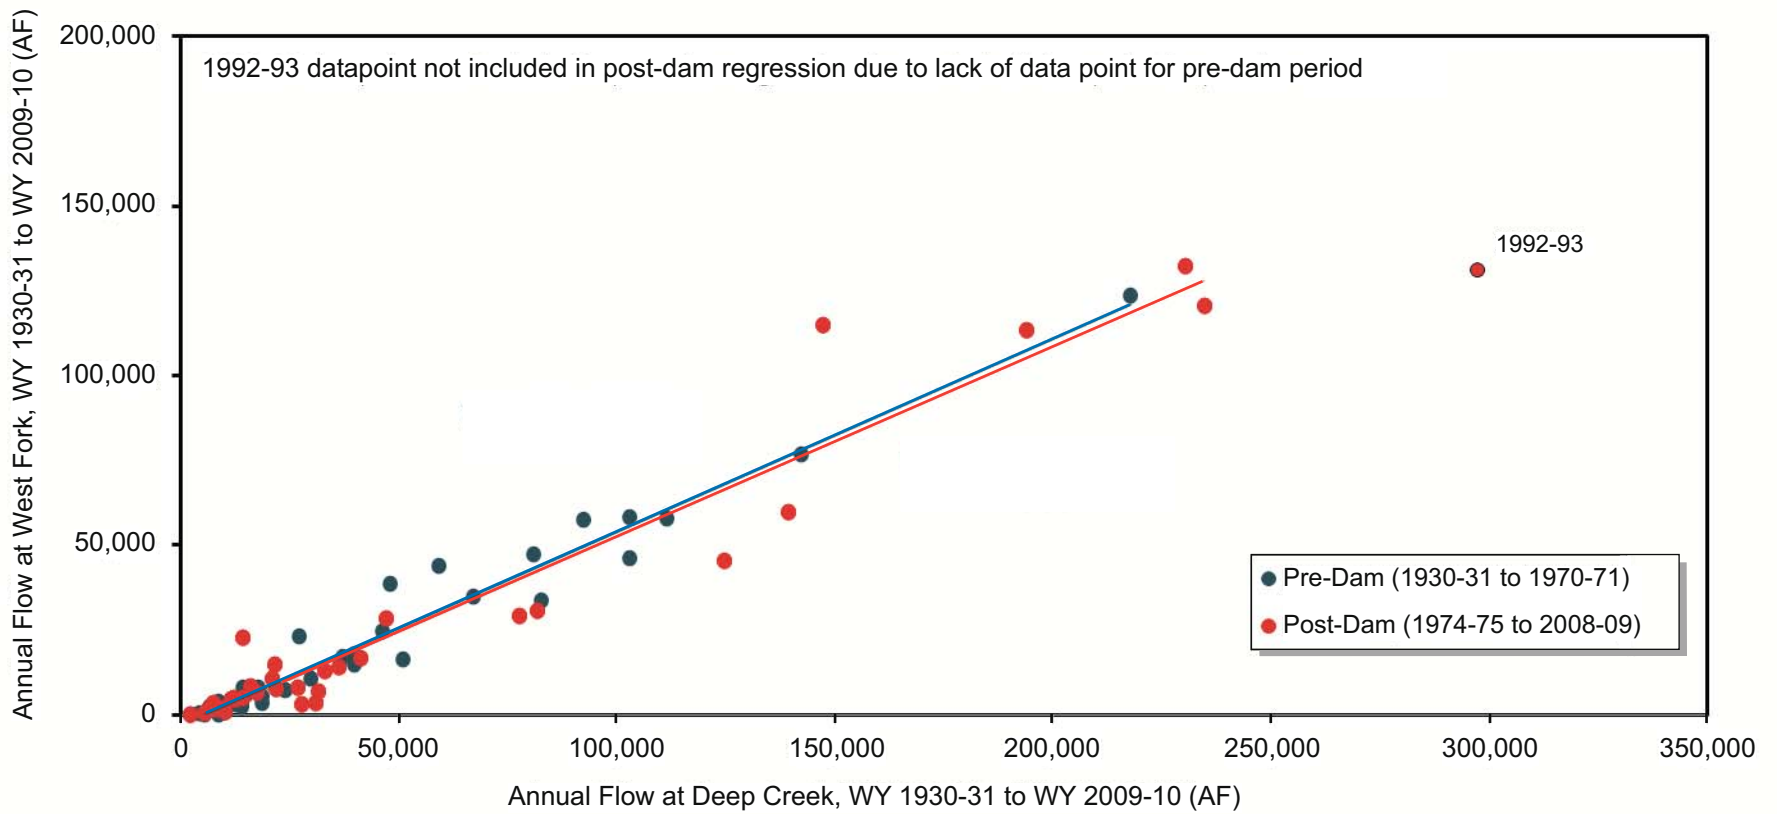

Note: Data for 43 largest storms on Record (WY 1930-31 to WY 2008-09)

February 2013	Figure B5 Comparison of Mean Daily Flow at Deep Creek Near Hesperia and West Fork Mojave River near Hesperia
TODD ENGINEERS Alameda, California	

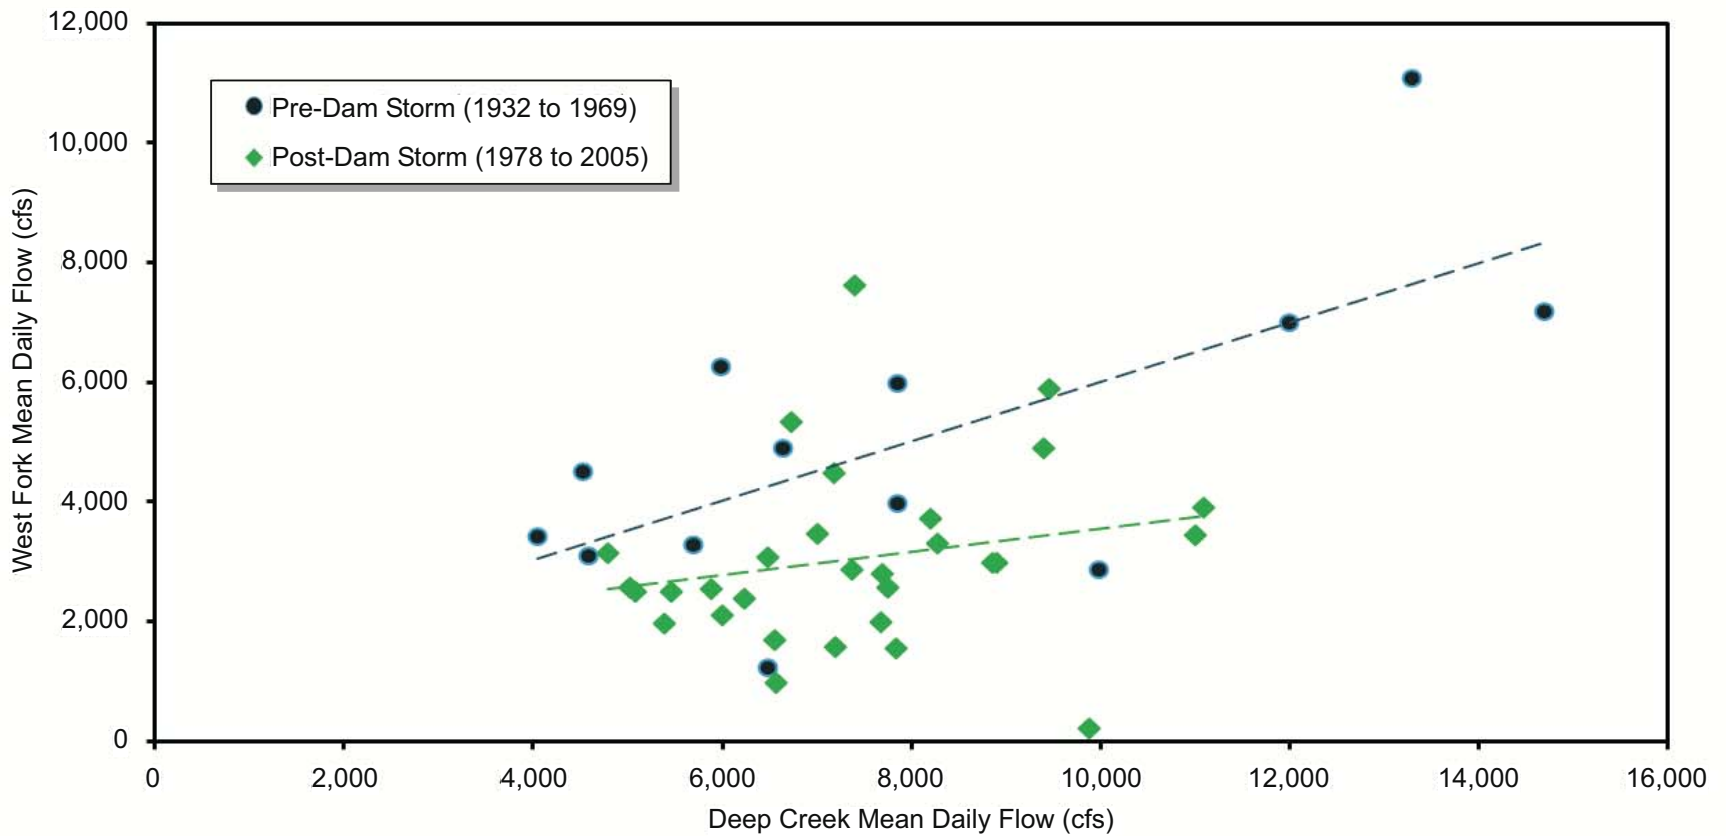

Note: Data for 43 largest daily mean Discharge on Record (WY 1930-31 to WY 2008-09)

February 2013	Figure B6 Occurrences of Mean Daily Discharge exceeding 7,300 cfs West Fork Mojave River near Victorville plus Deep Creek near Hesperia
TODD ENGINEERS Alameda, California	

The results of the analyses conducted with respect to Cedar Springs Dam indicate that the operation of Silverwood Lake has little to no effect on the volume of flow in West Fork. However, the attenuation effect of Silverwood Lake is measurable, at least for larger storm events. While comparisons of maximum mean daily flows for Deep Creek and West Fork illustrate this effect, detailed accounting of flows before and after maximum mean daily discharges are needed to quantify and track the attenuation effect of Silverwood Lake downstream to the Mojave River Dam. While such an evaluation was beyond the scope of this study, considering that natural inflows to Silverwood Lake during larger storms are released typically within 24 and less than 48 hours (i.e., similar to the detention times calculated by Durbin and Hardt [1974] in their analysis of downstream impacts from the Mojave River Dam), it seems likely that the impact of stormflow detention in Silverwood Lake on downstream flows would be similar to the impact of the Mojave River Dam on the volume of flows at Barstow, which were found by Durbin and Hardt to be minimal.

1.6 Evaluation of Streamflow Data related to Mojave River Dam

While collective evidence from previous studies suggests that the effect of Mojave River Dam on downstream flows and groundwater recharge is relatively small, the examination of more recent data has not been performed. As stated in the dam design manual, the Mojave River Dam regulates discharges that exceed 7,300 cfs (USACE, 1966). Any flows below 7,300 cfs result in no significant reservoir storage, and discharge through the outlet works is effectively unrestricted.

As an initial step, the long-term streamflow record under pre-dam and post-dam conditions was reviewed to identify the frequency at which combined inflow above the Mojave River Dam exceeds 7,300 cfs. Measured inflow above the Mojave River Dam is represented by the sum of mean daily flows for Deep Creek at Hesperia and West Fork Mojave River near Hesperia. Based on a review of peak discharges for West Fork and Deep Creek reported by Durbin and Hardt (1974) and Bueno and Lang (1980), it is recognized that there are some additional periods in which the peak inflow above the Mojave River Dam exceeds 7,300 cfs, while the mean daily inflow does not. However, because these instances are likely to have resulted in only minor storage in the Forks Reservoir over short periods of time, these periods were not further considered.

Table B2 shows streamflow data for the dates when the mean daily inflow above The Forks exceeded 7,300 cfs from 1930 through 2010. Shown in the table are the maximum mean daily flows at The Forks and the associated with maximum daily discharge measured at the downstream gaging stations at Lower Narrows, Barstow, and Afton. Discharges shown in the table for the downstream gages do not necessarily occur on the same date as the reported discharge at The Forks. Inspection of the table shows that since 1930 mean daily inflows at The Forks have exceeded 7,300 cfs on 43 days, of which 30 days occurred after the Mojave River Dam was completed. Consecutive days exceeding 7,300 cfs are grouped into 26 storm events in the table. The table reveals the largest two gaps in time between large storm

Table B2
Summary of Mojave River Flows
when Mean Daily Flow above the Mojave River Forks Dam exceeds 7,250 cfs

Period	Water Year	Flow above Forks Dam exceeds 7,250 cfs ¹		Date ²	Maximum Mean Daily Flow (cfs)					
		Storm #	Day #		The Forks	Lower Narrows	Barstow	Afton		
Pre-Mojave River Forks Dam	1931-32	1	1	1932-Feb-09	7,480	7,830	2,410	1,430		
	1937-38	2	2	1938-Mar-02	19,000	16,000	18,000	NA		
			3	1938-Mar-03	9,000					
	1942-43	3	4	1943-Jan-23	13,850	12,200	7,380	NA		
	1957-58	4	5	1958-Apr-03	7,710	5,010	2,500	340		
	1965-66	5	6	1965-Nov-23	7,710	4,180	576	6		
			7	1965-Dec-29	11,550	5,060	2,460	1,170		
	1966-67	6	8	1966-Dec-06	12,860	6,860	3,370	403		
	1968-69	7	9	1969-Jan-25	21,890	17,500	11,100	6,050		
			10	1969-Jan-26	11,840					
		8	11	1969-Feb-24	12,250	21,000	14,800	9,500		
			12	1969-Feb-25	24,400					
			13	1969-Feb-26	9,050					
1977-78	9	14	1978-Feb-09	10,250	9,700	3,330	4,950			
		15	1978-Feb-10	14,300						
		10	1978-Mar-02	8,260				6,850	3,800	2,470
		11	1978-Mar-04	14,450				7,560	4,900	5,870
	1979-80	12	18	1978-Mar-05	11,870	4,450	50	NA		
			19	1980-Jan-29	9,690					
		13	20	1980-Feb-16	7,940	10,000	8,280	NA		
			21	1980-Feb-17	10,520					
1982-83	14	22	1980-Feb-19	9,560	8,500	7,450	NA			
		15	23	1983-Mar-01	11,590	8,950	7,520	2,200		
1992-93	16	24	1983-Mar-02	11,670	2,390	475	209			
		25	1993-Jan-07	10,117						
	17	26	1993-Jan-14	7,370	5,010	993	1			
		27	1993-Jan-16	9,410						
	18	28	1993-Jan-17	10,340	7,720	4,060	3,700			
		29	1993-Jan-18	7,980						
		19	30	1993-Feb-08				11,900	10,200	4,850
	20	31	1993-Feb-19	15,020	13,800	12,500	10,000			
32		1993-Feb-20	8,440							
1994-95	21	33	1994-Feb-15	8,780	3,410	600	1			
1997-98	22	34	1998-Feb-23	7,600	8,000	4,100	162			
		35	1998-Feb-24	7,620						
2004-05	23	36	2004-Oct-20	7,567	676	0	2			
		24	2004-Dec-29	8,630				1,420	2	1
	25	38	2005-Jan-08	10,500	14,000	16,300	8,470			
		39	2005-Jan-09	15,030						
		40	2005-Jan-10	12,080						
		41	2005-Jan-11	15,370						
	26	42	2005-Feb-21	11,930	4,500	4,950	1,000			
43		2005-Feb-22	8,120							

¹ Flow above The Forks Dam equals combined flow at West Fork and Deep Creek stream gages

² Date of peak mean daily flow at The Forks that exceeds 7,300 cfs (above Mojave River Dam since 1971)

Peak mean daily flows at Lower Narrows, Barstow, and Afton associated with peak flow above the Mojave River Dam and do not necessarily occur on the date shown in the table


NA = Flow at Afton gage not recorded

events from 1943 to 1958 and from 1969 to 1978, the latter of which coincides with the construction of the dams. **Figure B7** depicts the storm days in order based on magnitude. The figure shows that for the 43 largest discharges on record, flow above the Mojave River Dam ranged from 7,370 to 24,400 cfs. Of the 43 days, only 4 days exceed 15,000 cfs. All of the flows rates are well below the flow rate for the standard project flood (94,000 cfs), which is applied over a 3-day period. Thus, while the reservoir following a standard project flood is designed to empty in 2.33 days, it is reasonable to assume that flows associated with 26 largest storms on record were detained on the order of 1 day or less.

If the Mojave River Dam has played a significant role in increasing streamflow losses in the upper basin (above the Barstow gage) at the expense of downstream flows, the attenuation of discharge rates in the downstream direction should be greater following the construction of the dams. **Figure B7** depicts the maximum mean daily flows at each of the four gaging stations for the same 26 storm events shown on **Table B2**. The figure reveals a significant amount of variability in the attenuation of maximum mean daily flows measured at The Forks in the downstream direction, and no trend in attenuation is readily observed between pre-dam and post-dam storm events in the chart. The variability in attenuation for each storm is illustrated also in the plot of the maximum mean daily flow measured at The Forks versus associated maximum mean daily flow at Barstow (**Figure B8**). Again no trend is observed between pre-dam and post-dam data in **Figure B8**. The figures indicate that while the Mojave River Dam is known to reduce the flow entering the Mojave River during large storms, the attenuation of flow in the downstream direction is not significantly controlled by the effect of the dam.


In order to identify the key factor causing the variability of downstream attenuation during large storm events, the examination of mean daily flows during individual storms must be evaluated within the context of overall rainfall conditions in the headwaters of the river over time. **Figure B9** shows the cumulative mean departure (CMD) curve of precipitation in the Mojave River headwaters from WY 1910-11 through WY 2007-08. The CMD curve represents the cumulative difference (departure) in precipitation relative to mean annual precipitation for the period of record (40.75 inches) and is a useful method for identifying trends. Positively-sloped sections of the CMD curve represent periods of above-average precipitation, while negatively-sloped sections of the curve represent periods of below-average precipitation. The dashed straight red line represents zero departure from the mean, a condition that would result if precipitation for every year was equal to the mean precipitation. The area above the dashed red line represents surplus precipitation, while the area below the dashed red line represents deficit precipitation. Because the CMD curve is a measure of cumulative conditions relative to the long-term average, the CMD curve begins and ends at zero. The CMD curve indicates that climatic conditions were very wet from 1936 to 1945, which corresponded to in a large surplus in precipitation. This was followed by an extended dry period that lasted over 20 years until the record flood of 1969. By the end of the dry period, any gains in precipitation prior to 1945 were effectively erased. Since 1969, wet years (e.g., 1980, 1983, 1993, and 2005) have yielded significantly above-average precipitation but are

Summary of Mojave River Flows (WY 1930-31 to WY 2009-10)

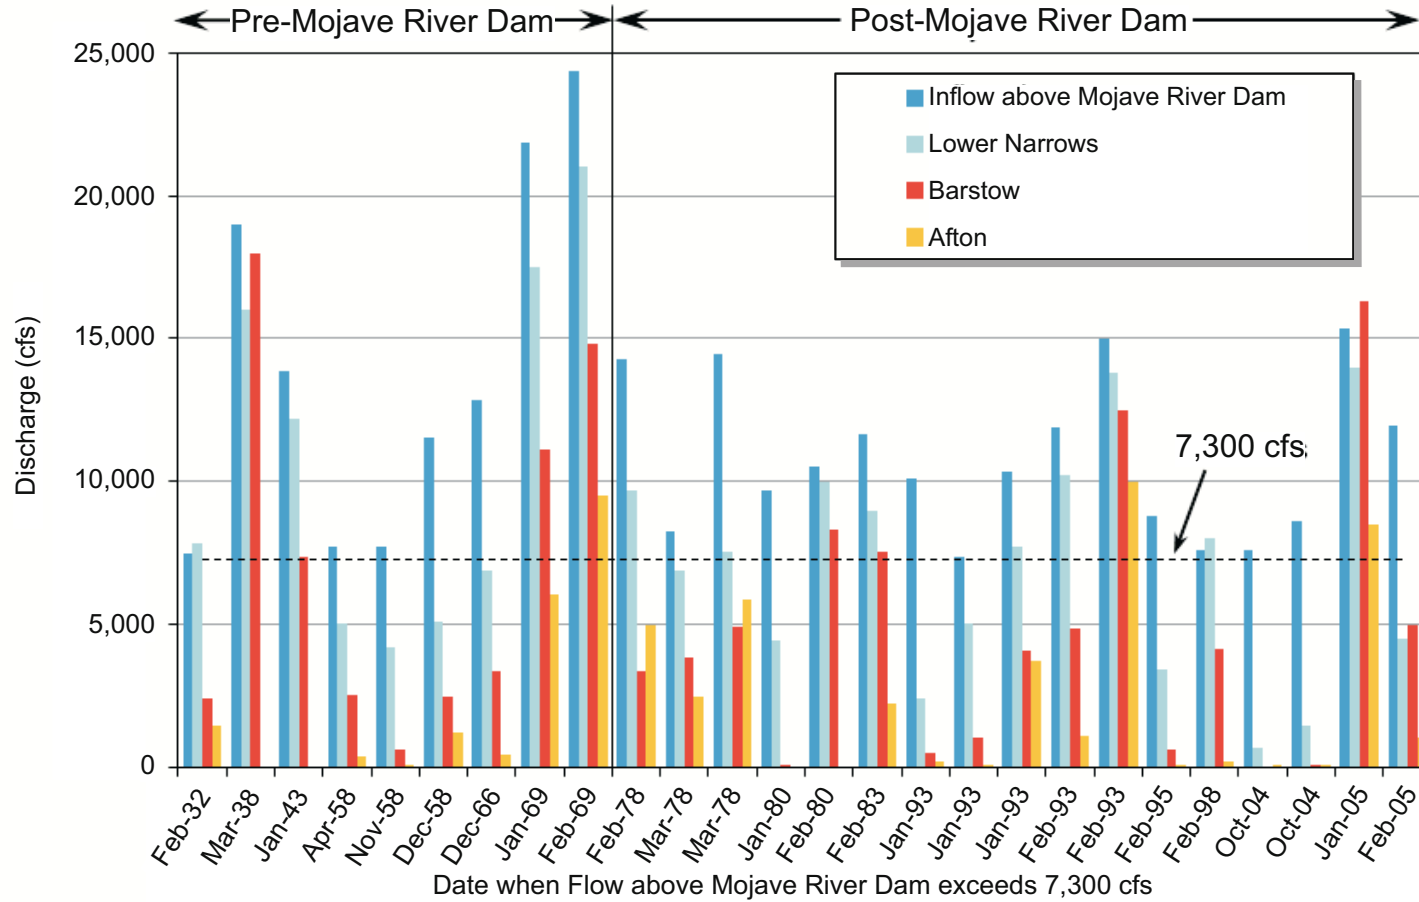


February 2013
 TODD ENGINEERS
 Alameda, California

Figure B7
Summary of Mojave River Flows
when Mean Daily Flow
above Mojave River Dam
exceeds 7,300 cfs

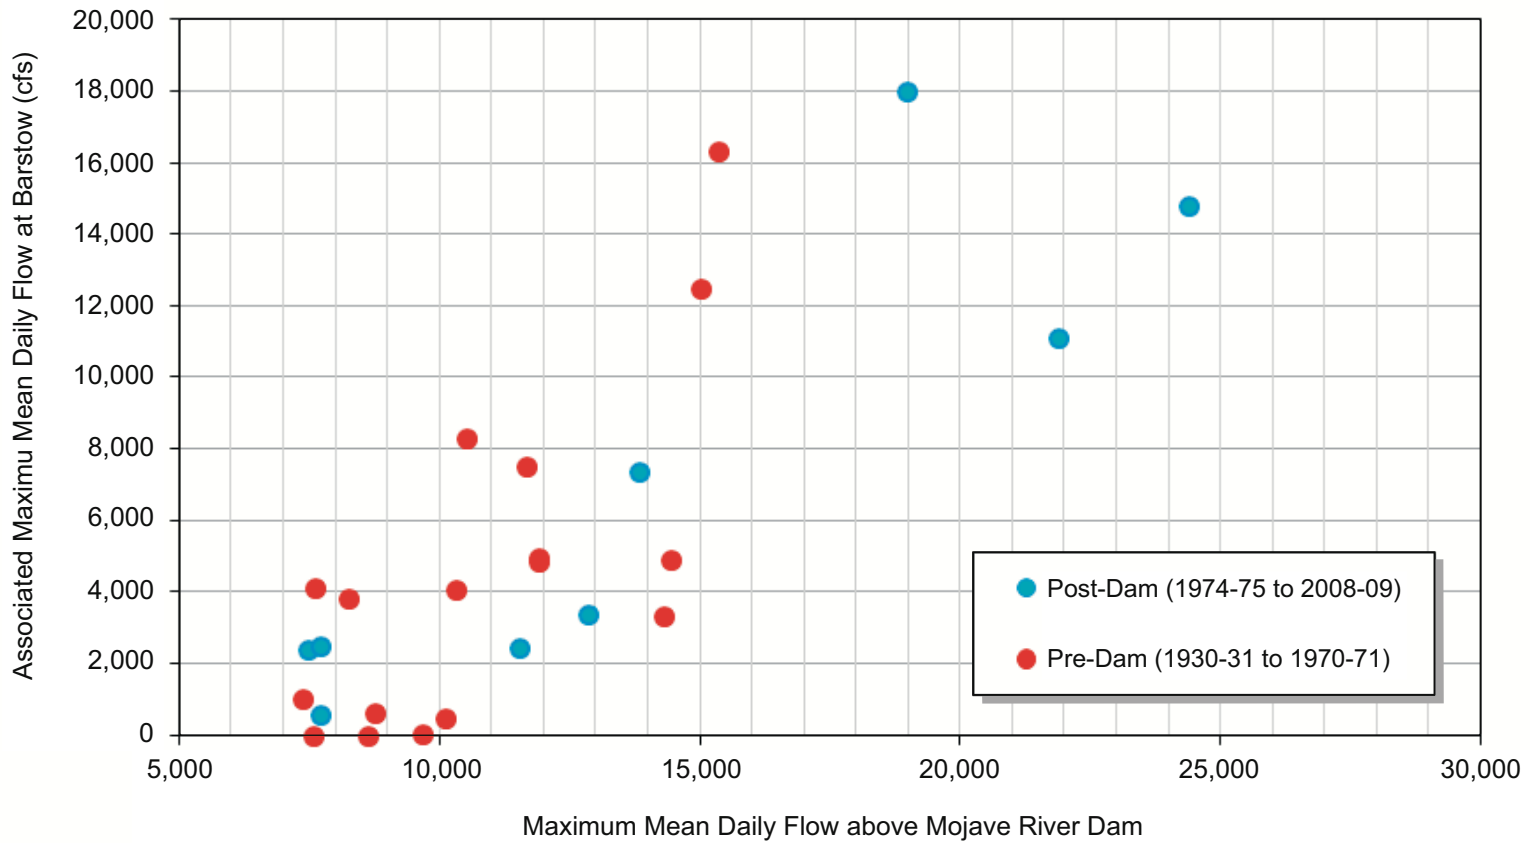

February 2013
 TODD ENGINEERS
 Alameda, California

Figure B8
Comparison of Maximum Mean
Daily Flows above Mojave River
Dam and Associated Maximum
Mean Daily Flow at Barstow

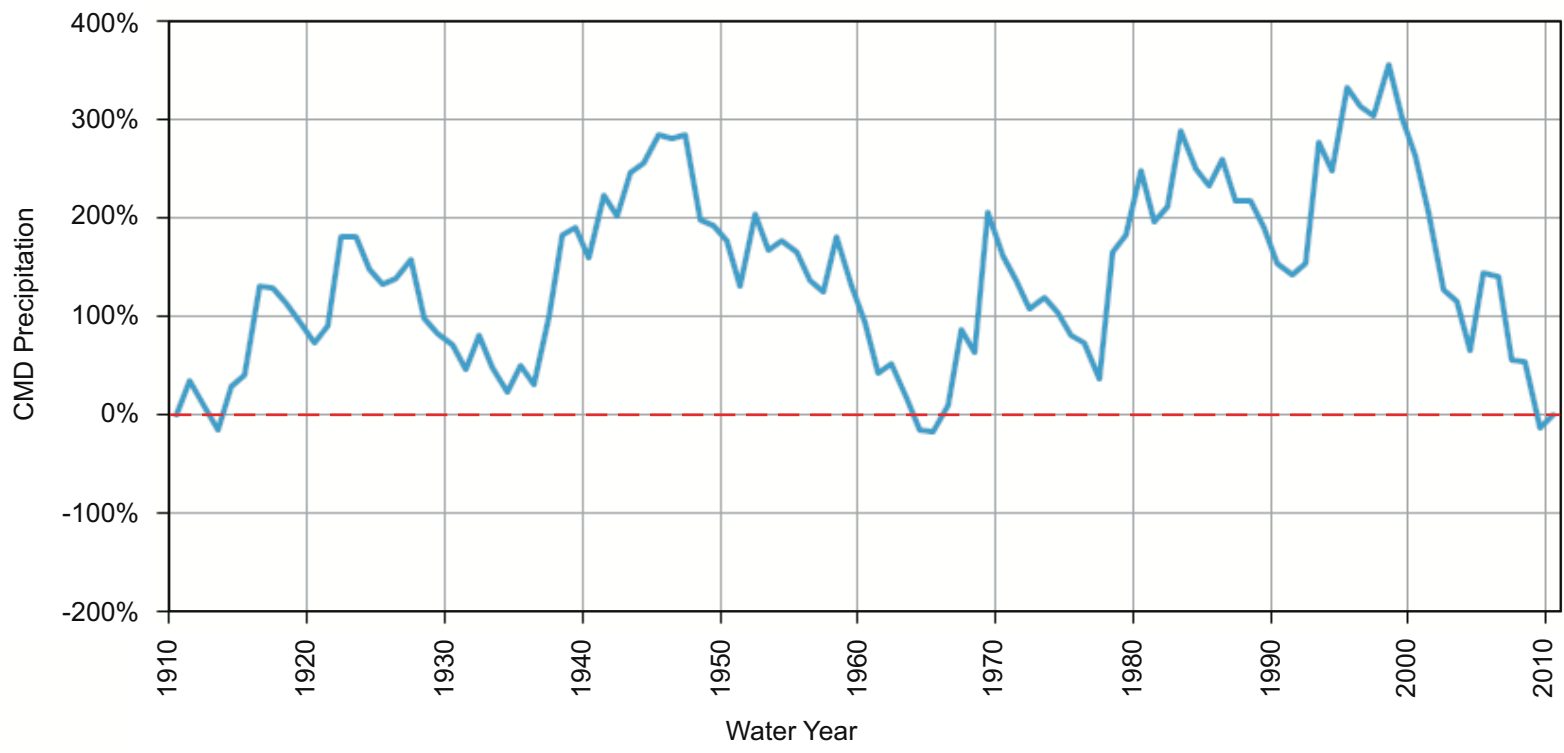


February 2013
 TODD ENGINEERS
 Alameda, California

Figure B9
Cumulative Mean Departure
for San Bernardino
Mountain Precipitation

infrequent and separated by longer periods of below-average precipitation. Over the period of record, the frequency and duration of deficit precipitation (when the CMD curve is below the zero line) has been low and short, due to the large surplus developed through the mid-1940s and large single-year precipitation in more recent times.

Examination of the peak discharges during the winter floods of 1993, which occurred after a 10-year period of below-average precipitation, is particularly revealing. As shown in **Table B2**, in January and February of 1993, five storms produced stormflows on eight days that exceeded 7,300 cfs at The Forks. In addition, significant flows less than 7,300 cfs (not shown) occurred on several other days. **Figure B10** depicts the maximum mean daily discharges measured at the Lower Narrows and Barstow gages for these 5 storm events. Flows are measured as a percentage of flow at The Forks. The figure shows that for each of the five storm events, the maximum mean daily flow rate at The Forks is more preserved at Lower Narrows than further downstream at Barstow, as indicated by the data points for Lower Narrows plotting above the data points for Barstow. The positive trajectory of both lines over time also indicate that the maximum mean daily flow rate at The Forks is preserved at a higher and higher percentage at Lower Narrows and Barstow from storm to storm. Also, a large increase is observed first at Barstow from the first storm (January 7) to the second storm (January 14), and then later at Barstow from the second storm (January 14) to the third storm (January 16-18). This trend represents the process by which the river channel is progressively saturated in the downstream direction by each successive flood allowing for a higher and higher percentage of discharge at The Forks to flow to downstream reaches. **Table B2** shows that during the first storm event (January 7), the associated maximum mean daily flow at Lower Narrows and Barstow respectively represents only 24 and 5 percent of the maximum mean daily flow at The Forks. However, by the fifth storm event, the associated maximum mean daily flow at Lower Narrows and Barstow respectively represents 92 and 83 percent of the maximum mean daily flow at The Forks. This chart confirms the importance of antecedent flooding to downstream flows under current conditions. A closer examination of **Table B2** and **Figure B7** also shows that for the three storms prior to 1958, the maximum mean daily flows were fairly well preserved at Lower Narrows and Barstow during the first and only large storm. The preservation of flows indicates that historically higher groundwater levels beneath the river channel precluded the need for antecedent flooding of large magnitude and long duration to convey flows from The Forks to downstream portions of the Mojave River Basin.

Comparison of Maximum Mean Daily Flows above Mojave River Dam (above 7,300 cfs) and Associated Maximum Mean Daily Flow at Lower Narrows and Barstow January and February, 1993

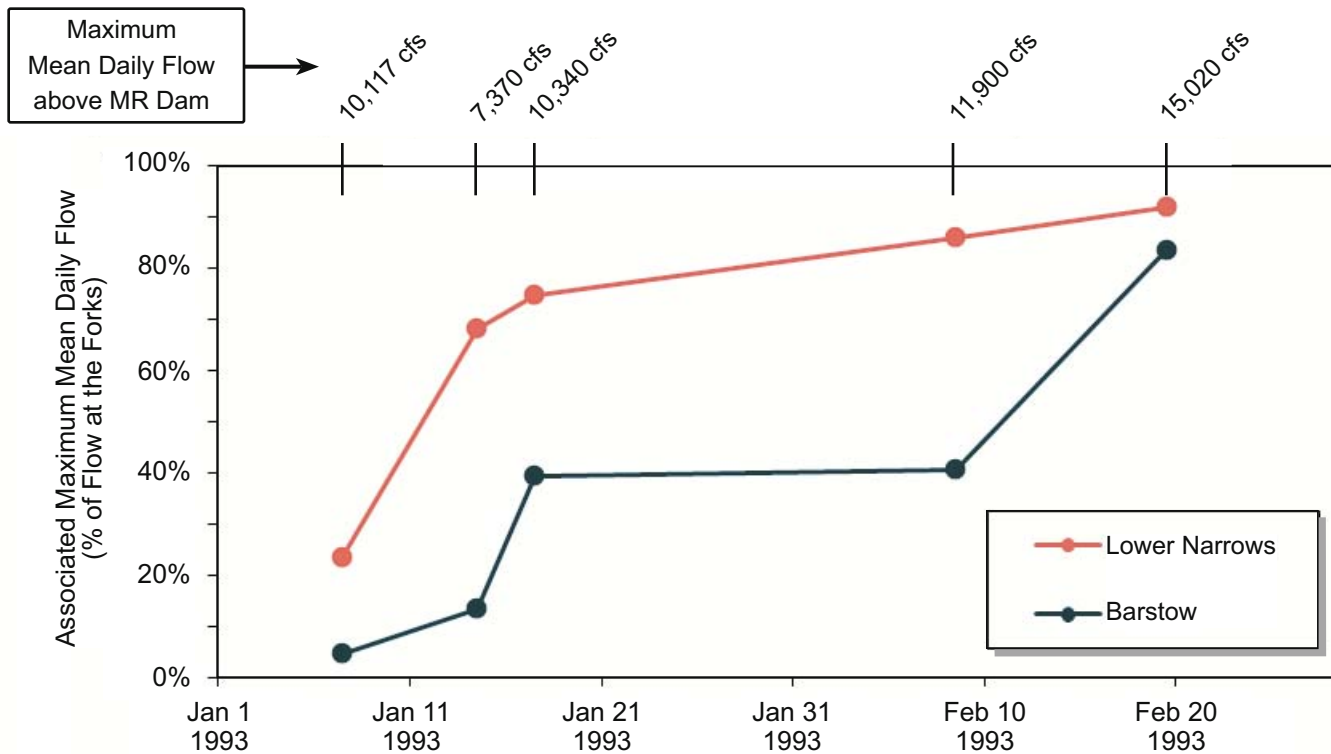

February 2013	Figure B10
TODD ENGINEERS Alameda, California	Comparison of Maximum Mean Daily Flows above Mojave River Dam and Associated Maximum Mean Daily Flow at Lower Narrows and Barstow - January and February, 1993

1.7 Conclusions

Previous studies on the potential impact of the Cedar Springs Dam and Mojave River Dam advanced the understanding of the factors that influence downstream Mojave River flow and groundwater recharge along specific reaches within the Mojave River Basin. While no single study presents conclusive evidence to quantify the effect of the Cedar Springs Dam (Silverwood Lake) and Mojave River Dam on downstream flows and groundwater recharge, key findings from previous studies and results from the evaluation of recent streamflow data provide multiple lines of evidence that support the following conclusions:

1. The construction and operation of Cedar Springs Dam and Silverwood Lake has resulted in little to no impact on the volume of water that naturally flows in the West Fork of the Mojave River.
2. The construction and operation of the Mojave River Dam has likely resulted in little to no impact on the volume of flows reaching downstream areas of the basin.
3. The temporary detention of natural inflows (or flood attenuation) in Silverwood Lake during large flows is measurable for large storm events. To reliably quantify the attenuation effect of Silverwood Lake on downstream flows, detailed surface water modeling of flows preceding and following periods of maximum discharge is necessary. However, with similar detention times for both dams (less than 1 to 2 days), the impact of stormflow detention in Silverwood Lake on downstream flows is expected to be similar to that of the Mojave River Dam on downstream flows (i.e., minimal).
4. The effects of the Cedar Springs Dam and Mojave River Dam together represent one *potential* factor among several *known* factors that have influenced the frequency, magnitude, and duration of downstream stormflows over time.
5. As a percentage of total flow at The Forks, streamflow losses in the two upper-gaged reaches in the basin (The Forks to Lower Narrows and Lower Narrows to Barstow) began to increase by 1958 – more than a decade before the construction of the dams. This trend has the proportional effect of decreasing the volume of flow in the downstream direction.
6. The detention effect of the dams on the volume of flows reaching downgradient portions of the basin is likely to be small compared to the effect of groundwater level declines beneath the river channel beginning in the late 1940s/early 1950s, which has increased the absorption potential of the Mojave River. Groundwater level declines can be attributed to increased groundwater production in the floodplain and regional aquifers from the late 1940s combined with decreased storm runoff entering the Mojave River from its headwaters due to dry conditions from 1945 to 1965.

7. Any minor potential net increase in streamflow losses in the upper portion of the basin as a consequence of flood attenuation by the upstream dams is offset to some degree by the minor reduction in stormflow exiting Afton Canyon for the same reason. The net effect of both processes on downstream water supply has not been quantified, and further examination of available data for this purpose is not likely to yield conclusive results given the multitude of factors that affect flow between The Forks and Afton Canyon.

8. Streamflow simulations based on reservoir and river flow routing analyses are highly sensitive to the subjective river infiltration functions incorporated in the adopted models. However, more rigorous analysis is not likely to increase the certainty of conclusions on the effect of the dams on downstream flows and groundwater recharge.

1.8 References

(See master reference list in main report)