

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 1 (P1) HOLE LOCATION: Mojave River
ELEVATION: _____ LOGGED BY: Edwin Lin
DATE STARTED: 4/20/2011 DATE FINISHED: 4/20/2011
Lat 34.926412 Long -116.638884

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 33.13 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 50 feet bgs COMPLETED DEPTH: 43 feet bgs

COMPLETION/INFORMATION

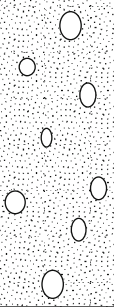





CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 43 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 33 - 43 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 50 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG		
		LITHOLOGY	WELL COMPLETION	
0	(SP) Pale yellow (5YR 8/2) fine sand.			Note: no discrete samples collected; cuttings brought to surface by auger flights used for geologic logging
5	(SW) Pale brown (10YR 6/3) fine to coarse sand with occasional cobbles up to 1/4-inch diameter.			
10	(SW) Grayish brown (10YR 5/2) fine to coarse sand with fine gravel.			
15	(SW) Brown (10YR 5/3) fine to coarse sand with some fine gravel.			
20	(SW) Grayish brown (10YR 5/2) fine to coarse sand with some gravel and cobbles up to 1/2-inch.			
25				
30	(SW) Brown (10YR 5/3) fine to coarse sand with some fine gravel and cobbles up to 1/2-inch.			
35				

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 1 (P1) HOLE LOCATION: Mojave River
ELEVATION: LOGGED BY: Edwin Lin
DATE STARTED: 4/20/2011 DATE FINISHED: 4/20/2011
Lat 34.926412 Long -116.638884

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	
		LITHOLOGY	WELL COMPLETION
40	(SW) Brown (10YR 5/3) fine to coarse sand with some fine gravel and cobbles up to 1/2-inch.		
45	(SM) Dark grayish brown (10YR 4/2) silty (fine to coarse) sand with minor clay.		
50	(CL) Brown (10YR 4/3) moderately stiff silty clay.		
	Total Depth = 50' bgs		
55			
60			
65			
70			
75			

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903
HOLE NO.: Piezometer 2 (P2)
ELEVATION:
DATE STARTED: 4/20/2011
Lat 34.930192 Long -116.633316

PROJECT LOCATION: Camp Cady
HOLE LOCATION: Mojave River
LOGGED BY: Edwin Lin
DATE FINISHED: 4/20/2011

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 21.75 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 40 feet bgs COMPLETED DEPTH: 38 feet bgs

COMPLETION/INFORMATION





CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 38 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 28 - 38 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 40 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG		
		LITHOLOGY	WELL COMPLETION	
0	(SP) Pale yellow (5Y 8/4) fine sand with cobbles up to 1/2-inch.			Note: no discrete samples collected; cuttings brought to surface by auger flights used for geologic logging
5	(SW) Grayish brown (10YR 5/2) fine to medium coarse sand with some cobbles up to 1/2-inch.			
10	(SW) Grayish brown (10YR 5/2) fine to medium coarse sand with cobbles up to 1.5-inch increasing with depth.			
15				
20	(SW) Dark grayish brown (10YR 4/2) fine to coarse sand with cobbles up to 1/2-inch.			
25				
30	(SW) Dark brown (10YR 3/3) fine to coarse sand.			
35	(SW) Brown (10YR 4/3) fine to coarse sand with some fine gravel.			

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 2 (P2) HOLE LOCATION: Mojave River
ELEVATION: LOGGED BY: Edwin Lin
DATE STARTED: 4/20/2011 DATE FINISHED: 4/20/2011
Lat 34.926412 Long -116.638884

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	
		LITHOLOGY	WELL COMPLETION
	(SW) Brown (10YR 4/3) fine to coarse sand with some fine gravel.		
	(CL) Brown (10YR 4/3) moderately stiff silty clay.		
40	Total Depth = 40' bgs		
45			
50			
55			
60			
65			
70			
75			

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903
HOLE NO.: Piezometer 3 (P3)
ELEVATION:
DATE STARTED: 4/20/2011
Lat 34.933506 Long -116.628921

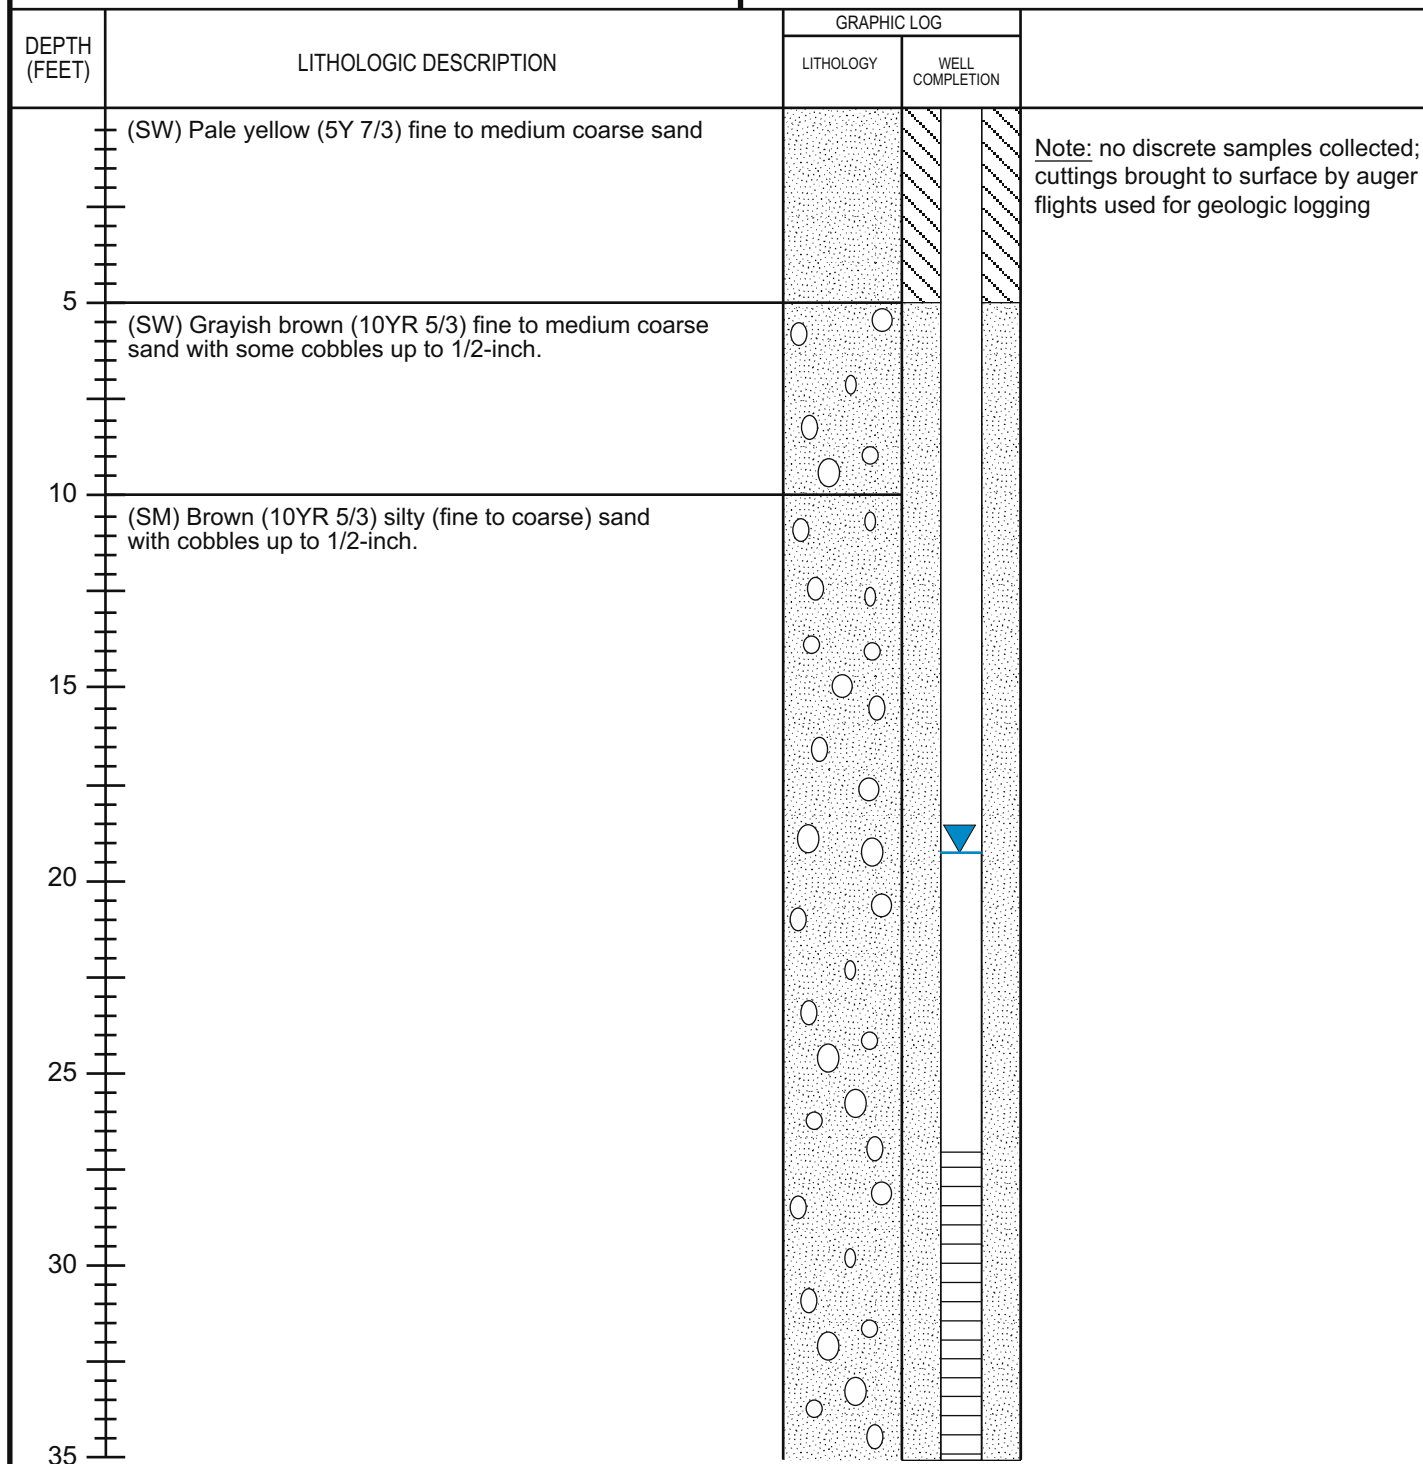
PROJECT LOCATION: Camp Cady
HOLE LOCATION: Mojave River
LOGGED BY: Edwin Lin
DATE FINISHED: 4/20/2011

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 19.29 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 50 feet bgs COMPLETED DEPTH: 37 feet bgs

COMPLETION/INFORMATION






CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 37 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 27 - 37 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 50 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 3 feet above grade



TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 3 (P3) HOLE LOCATION: Mojave River
ELEVATION: LOGGED BY: Edwin Lin
DATE STARTED: 4/20/2011 DATE FINISHED: 4/20/2011
Lat 34.933506 Long -116.628921

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	
		LITHOLOGY	WELL COMPLETION
35	(SM) Brown (10YR 5/3) silty (fine to coarse) sand with cobbles up to 1/2-inch.		
40	(SC) Very pale brown (10YR 7/3) silty clayey (fine) sand.		
45	(ML) Light yellowish brown (10YR 6/4) clayey sandy silt.		
50	(CL) Brown (10YR 4/3) moderately stiff silty clay.		
	Total Depth = 50' bgs		
55			
60			
65			
70			
75			

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

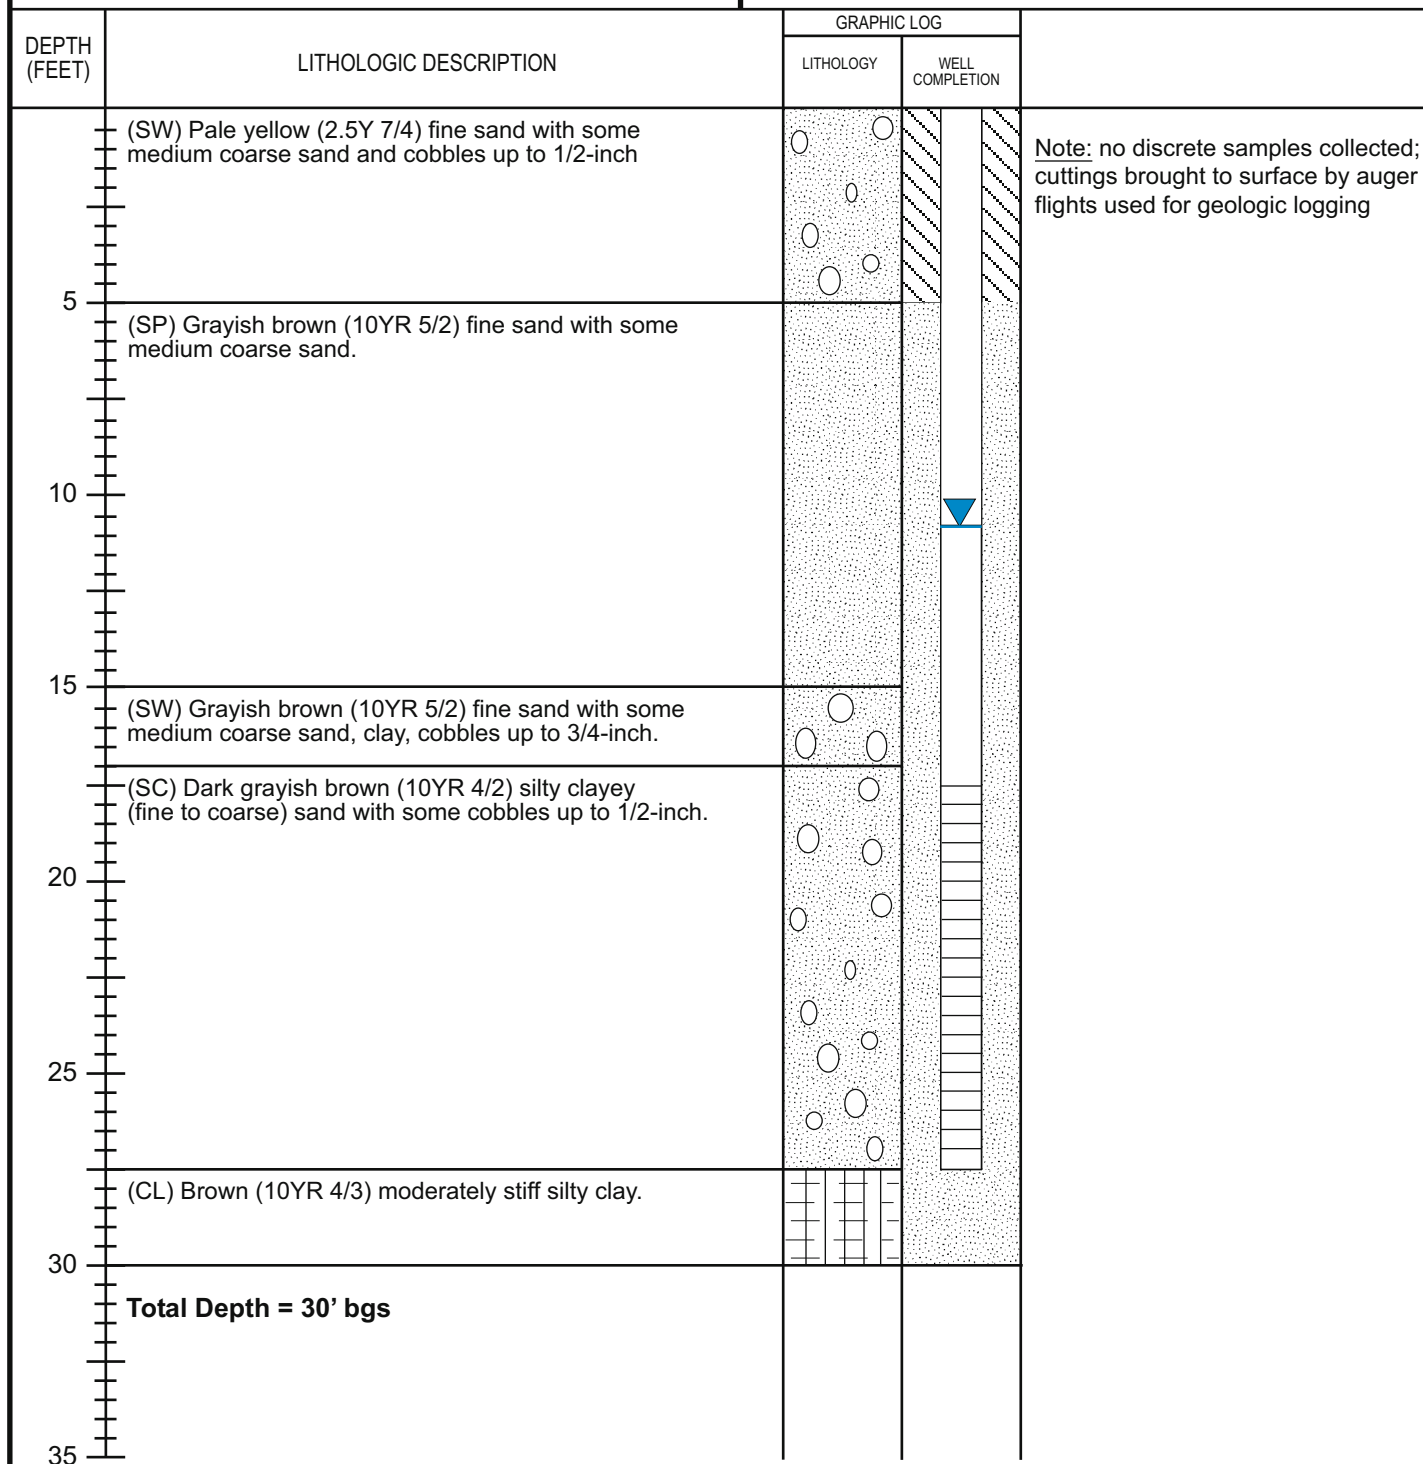
PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 4 (P4) HOLE LOCATION: Mojave River
ELEVATION: _____ LOGGED BY: Edwin Lin
DATE STARTED: 4/19/2011 DATE FINISHED: 4/19/2011
Lat 34.936292 Long -116.622919

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 10.80 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 30 feet bgs COMPLETED DEPTH: 27.5 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 27.5 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 17.5 - 27.5 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 30 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2.5 feet above grade



TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903
HOLE NO.: Piezometer 5 (P5)
ELEVATION:
DATE STARTED: 4/19/2011
Lat 34.936507 Long -116.616753

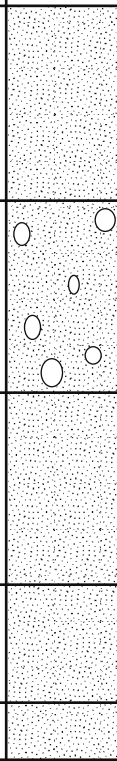
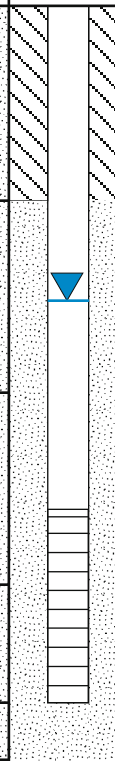

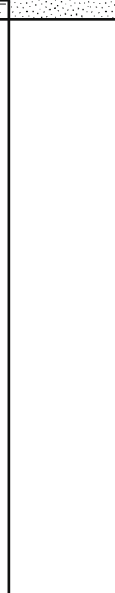
PROJECT LOCATION: Camp Cady
HOLE LOCATION: Mojave River
LOGGED BY: Edwin Lin
DATE FINISHED: 4/19/2011

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 7.64 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 20 feet bgs COMPLETED DEPTH: 18 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 18 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 13 - 18 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 20 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG		
		LITHOLOGY	WELL COMPLETION	
	(SP) Pale brown (10YR 6/3) fine sand.			Note: no discrete samples collected; cuttings brought to surface by auger flights used for geologic logging
5	(SW) Grayish brown (10YR 5/2) fine to coarse sand with some cobbles up to 1/2-inch.			
10	(SW) Brown (10YR 5/4) fine to coarse sand.			
15	(SW) Brown (10YR 5/3) fine to coarse sand.			
	(SC) Dark bluish gray (GLE Y 4/1) silty clayey (fine to coarse) sand.			
20	(CL) Dark bluish gray (GLE Y2 4/1) moderately stiff silty clay.			
	Total Depth = 20' bgs			
25				
30				
35				

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 6 (P6) HOLE LOCATION: Mojave River
ELEVATION: _____ LOGGED BY: Edwin Lin
DATE STARTED: 4/18/2011 DATE FINISHED: 4/18/2011
Lat 34.937081 Long -116.612885

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 4.92 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 25 feet bgs COMPLETED DEPTH: 25 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 25 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 20 - 25 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 25 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	
		LITHOLOGY	WELL COMPLETION
0	(SP) Pale brown (10YR 6/3) fine sand.		
5	(SW) Brownish yellow (10YR 6/6) fine to coarse sand with fine gravel.		
10			
15	(SW) Grayish brown (10YR 5/2) fine to coarse sand with fine gravel and minor silt.		
20			
25	(CL) Dark bluish gray (GEY2 4/1) stiff silty clay.		
	Total Depth = 25' bgs		
30			
35			

Note: no discrete samples collected; cuttings brought to surface by auger flights used for geologic logging

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903
HOLE NO.: Piezometer 7 (P7)
ELEVATION:
DATE STARTED: 4/18/2011
Lat 34.937776 Long -116.607647

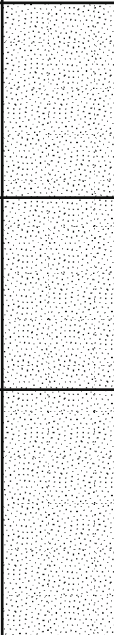
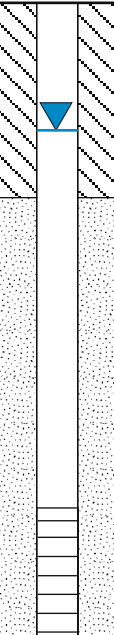
PROJECT LOCATION: Camp Cady
HOLE LOCATION: Mojave River
LOGGED BY: Edwin Lin
DATE FINISHED: 4/18/2011

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 3.21 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 18 feet bgs COMPLETED DEPTH: 18 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 18 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 13 - 18 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 18 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	
		LITHOLOGY	WELL COMPLETION
0	(SW) Pale Brown (10YR 4/3) fine to medium coarse sand.		 Note: no discrete samples collected; cuttings brought to surface by auger flights used for geologic logging
5	(SW) Grayish brown (10YR 5/2) medium to coarse sand with some fine gravel.		
10	(SW) Dark grayish brown (10YR 4/2) fine to coarse sand with some fine gravel.		
15	(CL) Dark bluish gray (GEY2 4/1) stiff clay.		
18	Total Depth = 18' bgs		
20			
25			
30			
35			

TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903
HOLE NO.: Piezometer 8 (P8)
ELEVATION:
DATE STARTED: 4/18/2011
Lat 34.938463 Long -116.602607

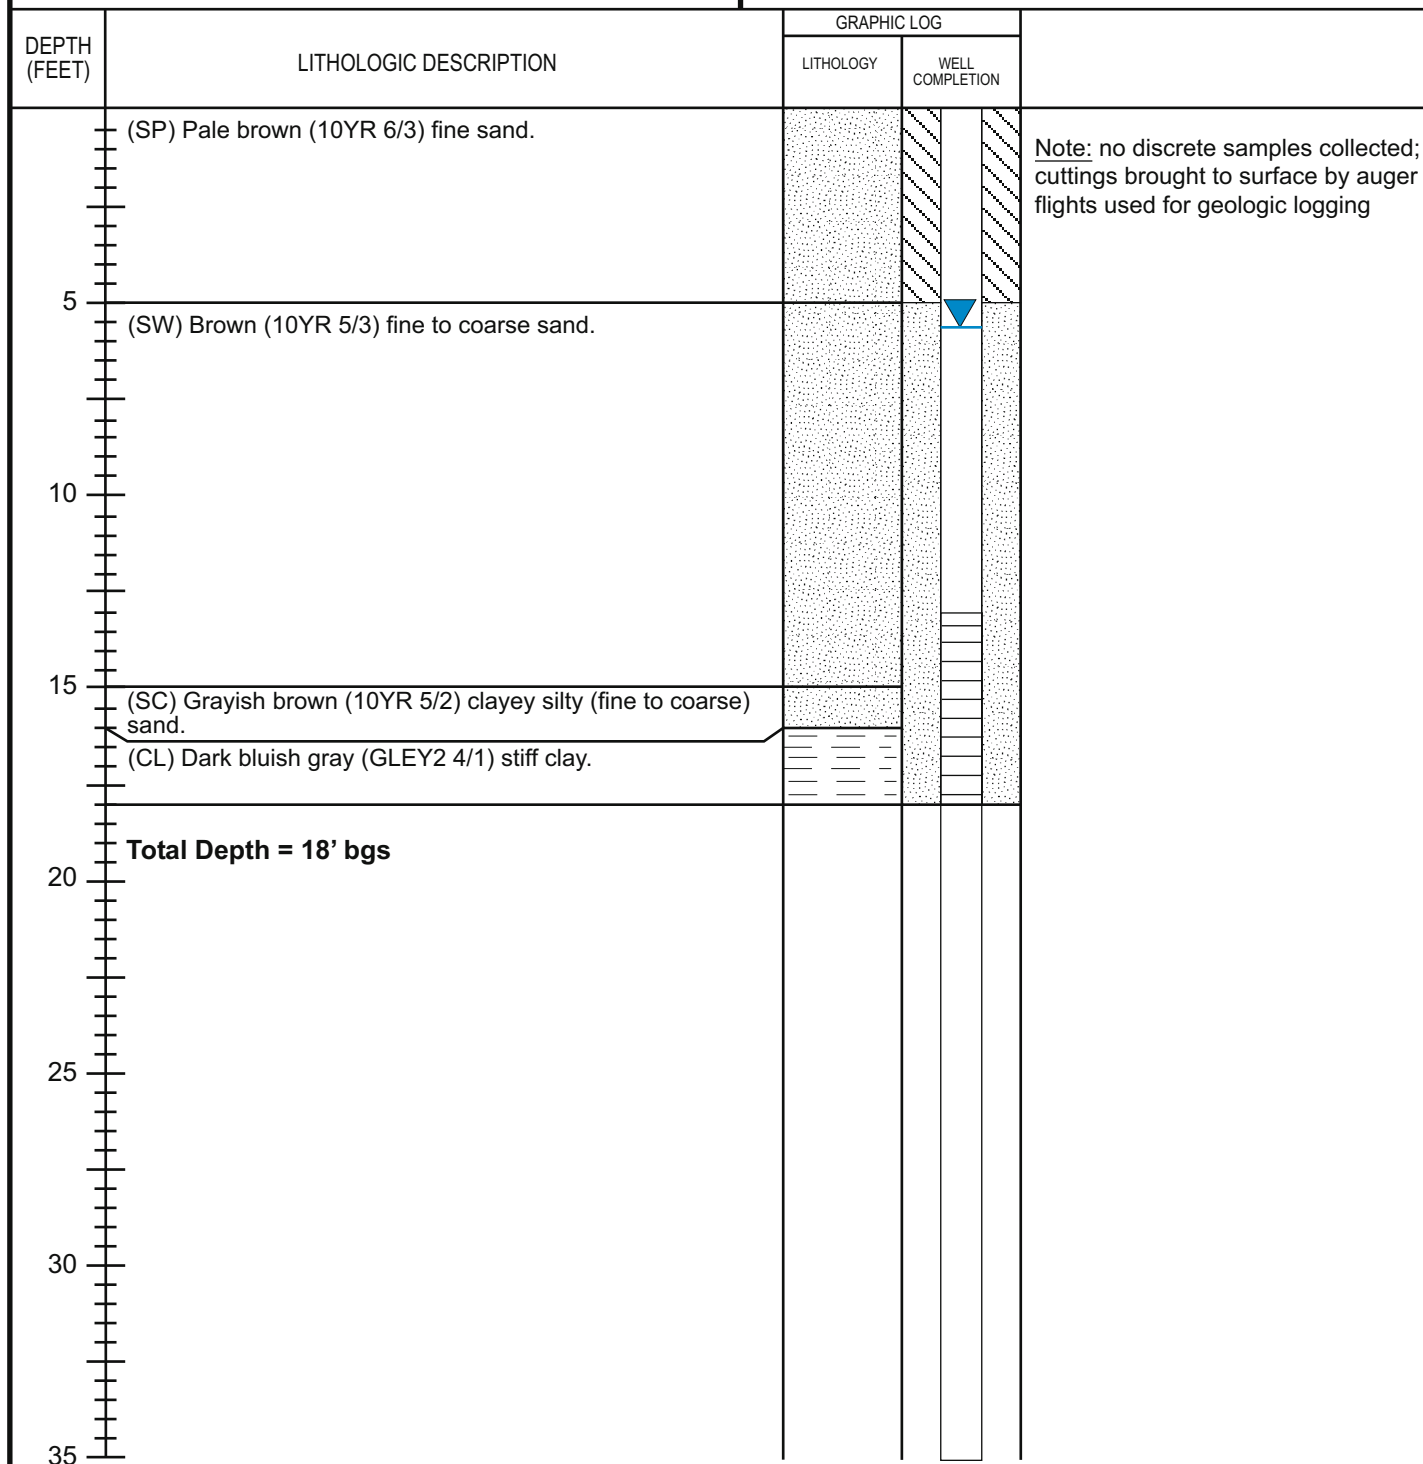
PROJECT LOCATION: Camp Cady
HOLE LOCATION: Mojave River
LOGGED BY: Edwin Lin
DATE FINISHED: 4/18/2011

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 5.62 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 18 feet bgs COMPLETED DEPTH: 18 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 18 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 13 - 18 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 18 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade



TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903
HOLE NO.: Piezometer 9 (P9)
ELEVATION:
DATE STARTED: 4/19/2011
Lat 34.940085 Long -116.596598

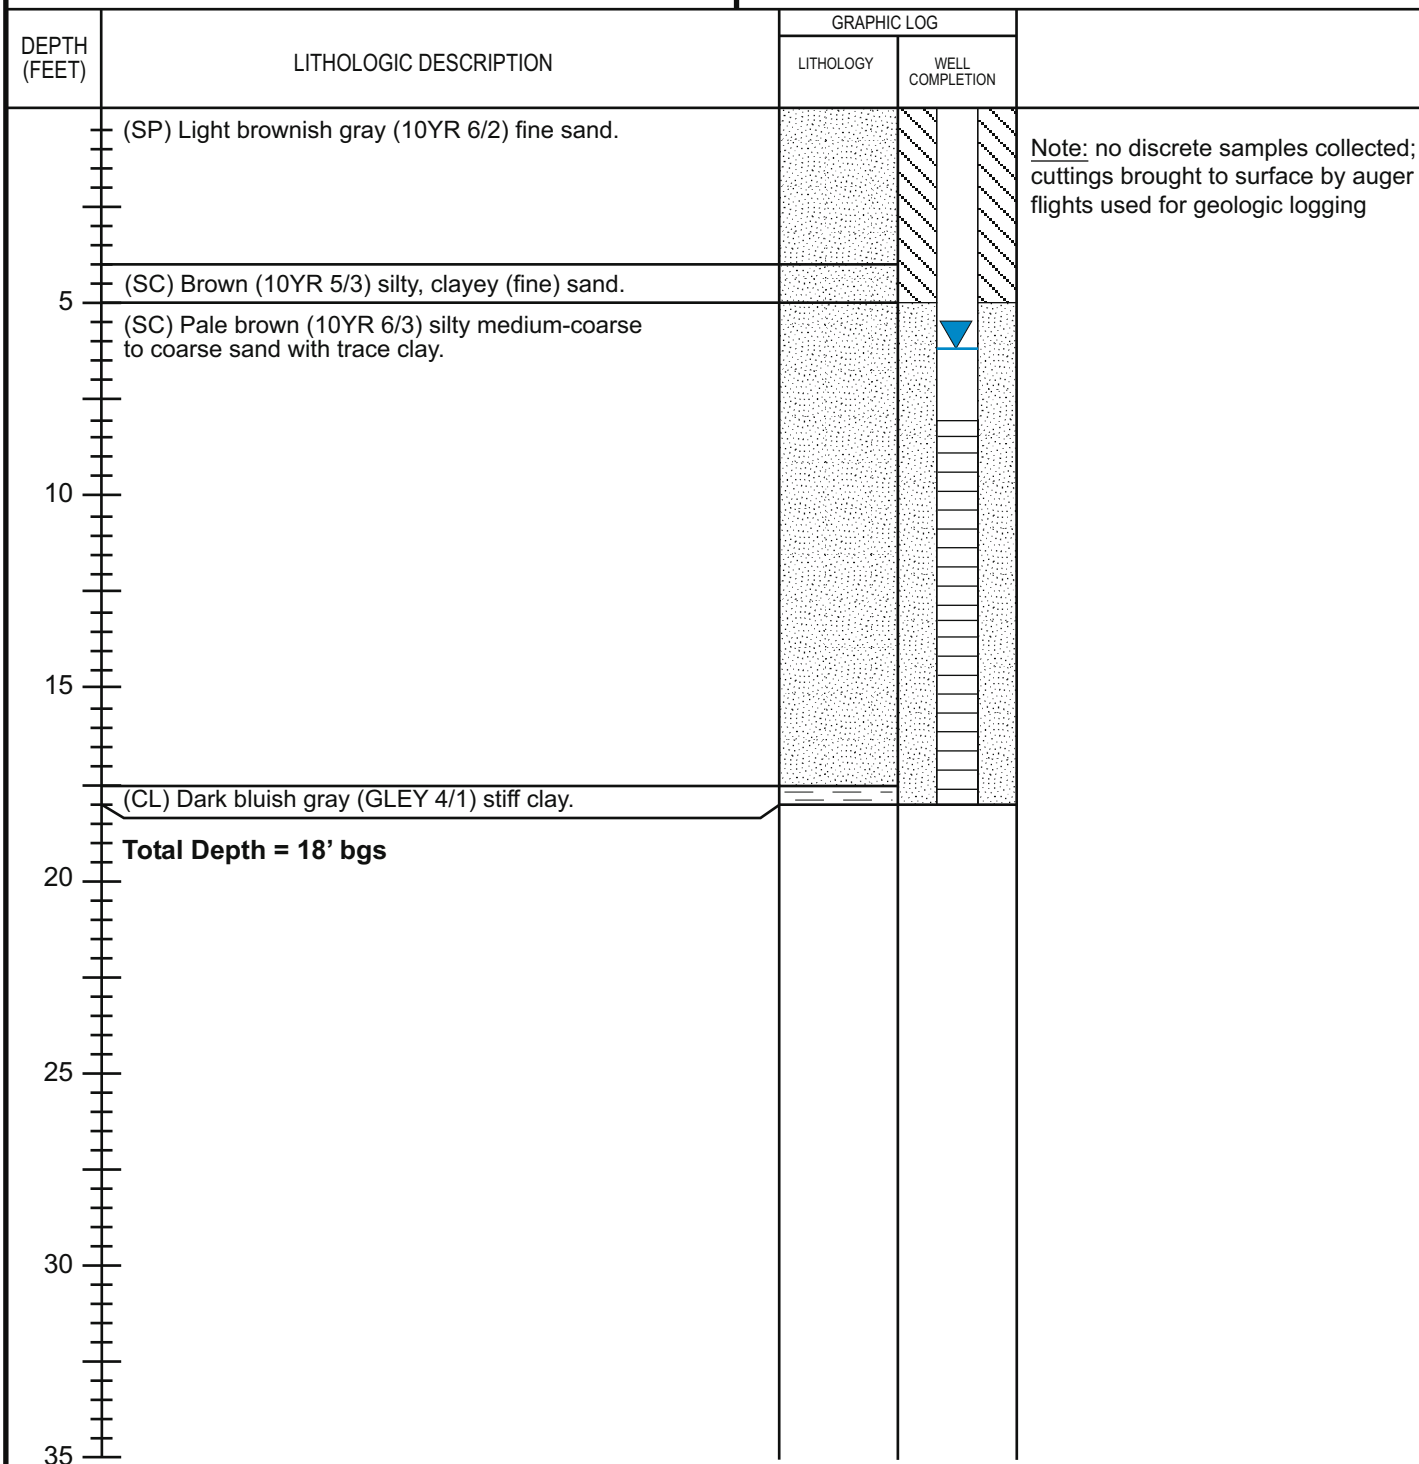
PROJECT LOCATION: Camp Cady
HOLE LOCATION: Mojave River
LOGGED BY: Edwin Lin
DATE FINISHED: 4/19/2011

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 6.20 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 18 feet bgs COMPLETED DEPTH: 18 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 18 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 8 - 18 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 18 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade



TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

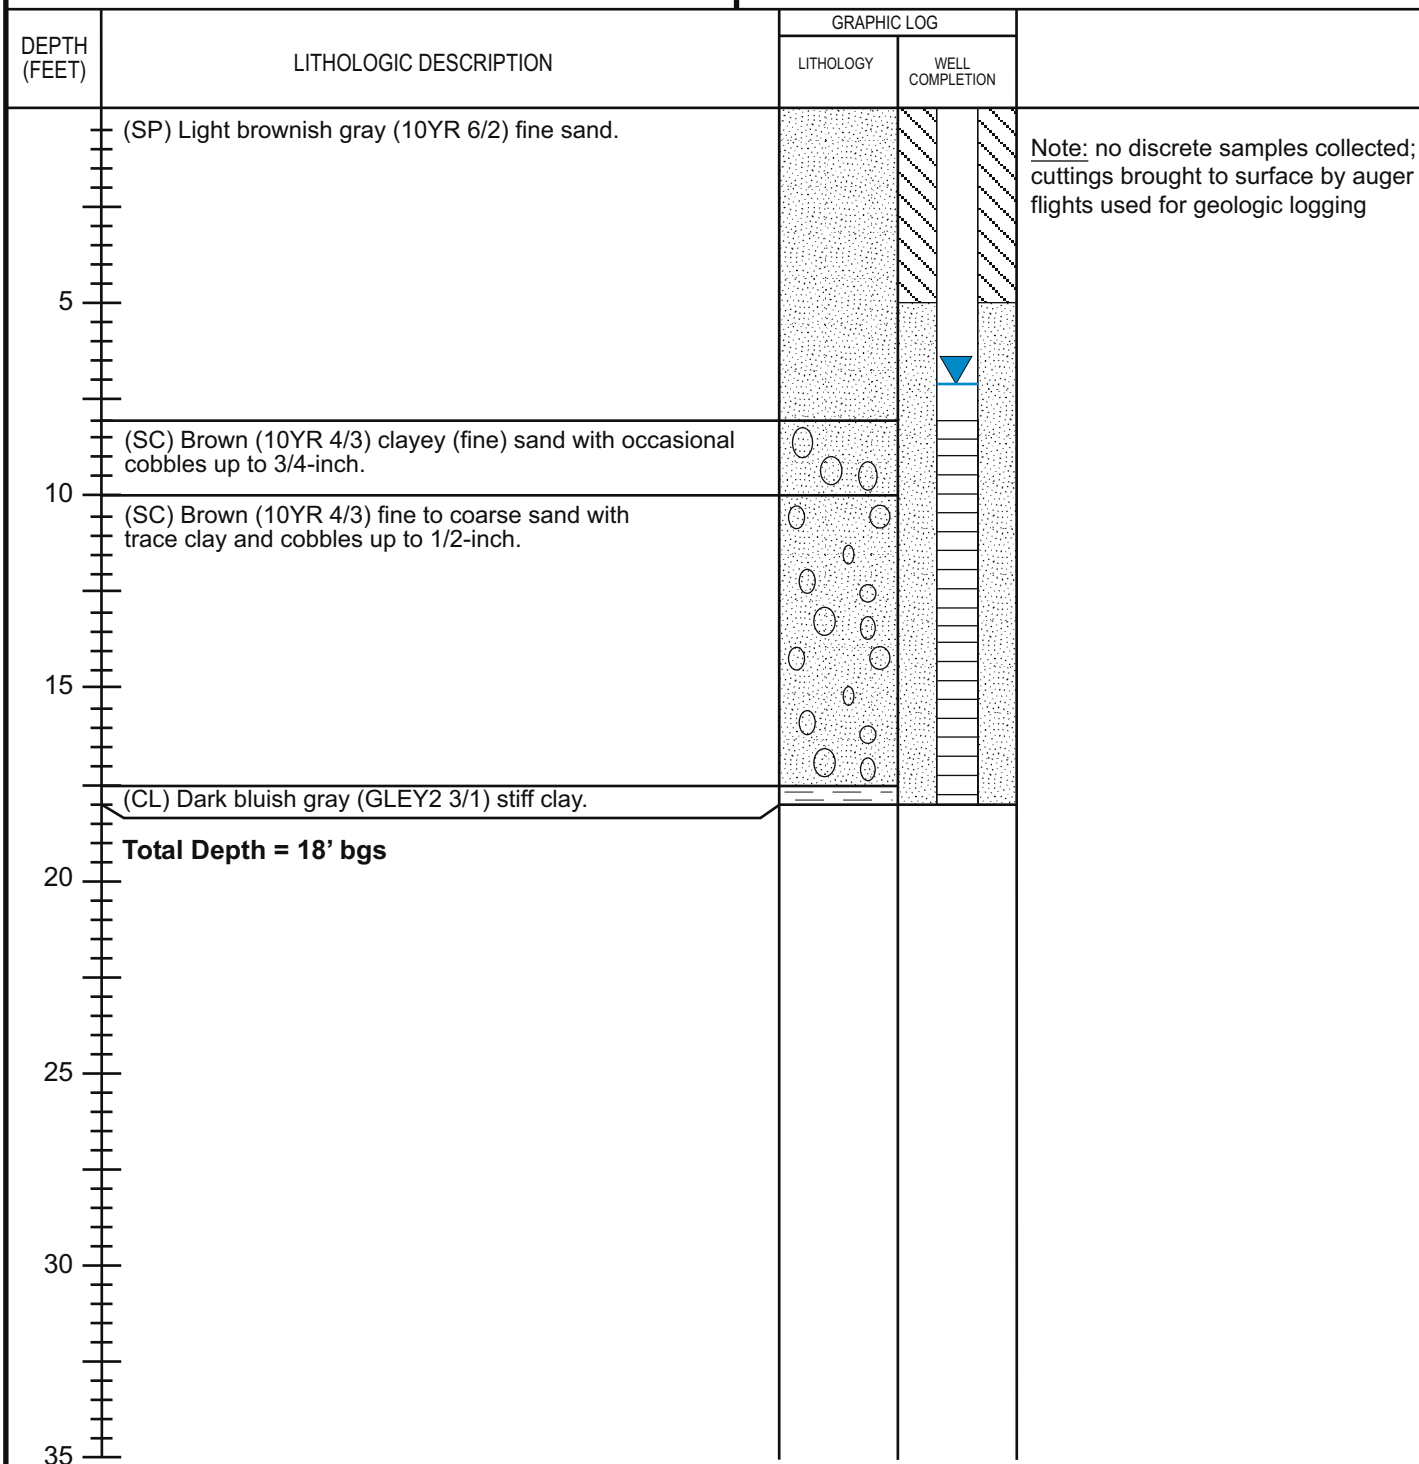
PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 10 (P10) HOLE LOCATION: Mojave River
ELEVATION: _____ LOGGED BY: Edwin Lin
DATE STARTED: 4/19/2011 DATE FINISHED: 4/19/2011
Lat 34.942583 Long -116.591406

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 7.10 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 18 feet bgs COMPLETED DEPTH: 18 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 18 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 8 - 18 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 18 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade



TODD ENGINEERS
Alameda, California

EXPLORATORY BORING/WELL LOG

PROJECT NO.: 64903 PROJECT LOCATION: Camp Cady
HOLE NO.: Piezometer 11 (P11) HOLE LOCATION: Mojave River
ELEVATION: _____ LOGGED BY: Edwin Lin
DATE STARTED: 4/19/2011 DATE FINISHED: 4/19/2011
Lat 34.944768 Long -116.586719

DRILLING INFORMATION

DRILLING AGENCY: Gregg Drilling and Testing
DRILLER: Santiago Vega
DRILLING EQUIPMENT: Marl M5-T (Rhino)
DRILLING METHOD: Hollow Stem Auger
DRILL BIT: 6-inch
SAMPLES TAKEN: Continuous
STATIC WATER LEVEL: 7.00 feet bgs SAMPLE TYPE: Flight
TOTAL DEPTH: 20 feet bgs COMPLETED DEPTH: 18 feet bgs

COMPLETION/INFORMATION

CASING SIZE & TYPE: 2-inch PVC Schedule 40
CASED INTERVAL: 0 - 18 feet
SCREEN SIZE AND TYPE: 2-inch PVC Schedule 40 0.010-slot
SCREENED INTERVAL: 13 - 18 feet
FILTER PACK: #2/12 Lapus Lustre Sand
PACKED INTERVAL: 5 - 20 Feet
SURFACE SEAL TYPE: Hydrated Bentonite Pellets
SURFACE SEAL INTERVAL: 0 - 5 feet
WELLHEAD: Riser casing 2 feet above grade

DEPTH (FEET)	LITHOLOGIC DESCRIPTION	GRAPHIC LOG		
		LITHOLOGY	WELL COMPLETION	
5	(SW) Grayish brown (10YR 5/2) fine to medium coarse sand with cobbles up to 1/4-inch.			Note: no discrete samples collected; cuttings brought to surface by auger flights used for geologic logging
10	(SW) Dark yellowish brown (10YR 4/4) medium coarse to coarse sand with trace gravel.			
15	(SW) Grayish brown (10YR 5/2) medium coarse to coarse sand with some silt, clay, and gravel.			
20	(SW) Grayish brown (10YR 5/2) medium coarse to coarse sand with some silt, clay, and cobbles.			
20	(CL) Dark bluish gray (GLE Y2 3/1) stiff clay.			
	Total Depth = 20' bgs			
25				
30				
35				